



# LSIS Electric Products

MCB / MC&TOR / MMS / MCCB / ACB / FDB / SMDB / VCB

## Miniature Circuit Breakers

Page 4

- 1, 2, 3 and 4 pole series up to 125AF
- B, C and D Characteristics

## Residual Current Circuit Break

Page 6

- 2 and 4 pole series up to 100AF
- Sensitivity up to 300mA
- Overcurrent protection type available

## Surge Protective Device

Page 8



## Contactors & Overload Relays

Page 12

### Metasol series

- 3 and 4 pole series up to 800AF Mini-contactors available
- AC/DC common use coil from 100AF
- Thermal (Bimetallic) and electronic type overload relays are available
- CE marked and UL approved

### Mini contactors

Page 20

### Digital motor protection relay

Page 21

### Manual Motor Starters

Page 22



## Molded Case Circuit Breakers

Page 24

### Susol/Metasol series

- 2, 3 and 4 pole series up to 1600AF
- Rated ambient temperature at 40 °C calibrated for 50 °C available
- CE marked according to IEC standard and UL approved MCCBs are also available.

## Earth Leakage Circuit Breakers

Page 32

### Metasol series

- 2, 3 and 4 pole series up to 800AF
- CE marked according to IEC standard



## Air Circuit Breakers

Page 36

### Susol/Metasol series

- 65, 85 and 150kA breaking capacity
- High functional digital trip relays
- CE marked and Marine classification

## LS Final Distribution Boards

Page 42

## LS SMDB Solution

Page 46

## Vacuum Circuit Breakers

Page 50



### Susol series






# Miniature circuit breakers


## 1, 2, 3 and 4 pole series up to 125AF

Type	MCB			
	BKN		BKN-b	
Protection	Overload and short circuit		Overload and short circuit	
Rated current	1, 2, 3, 4, 6, 10, 16, 20, 25, 32, 40, 50, 63A		1, 2, 3, 4, 6, 10, 16, 20, 25, 32, 40, 50, 63A	
Characteristic	B, C, D curve		B, C, D curve	
Poles	1p, 1p+N, 2p, 3p, 3p+N, 4p		1p, 1p+N, 2p, 3p, 3p+N, 4p	
Breaking capacity	1pole	2-4pole	1pole	2-4pole
	1A~63A 6kA at 230/400VAC	1A~63A 6kA at 400VAC	1A~63A 10kA at 240/415VAC	1A~63A 10kA at 415VAC
Standard	IEC 60898/60947-2		IEC 60898/60947-2	
Type of trip	Thermal magnetic release		Thermal magnetic release	
Electrical endurance	6000 operations		8000 operations	
Mount	On 35mm DIN rail		On 35mm DIN rail	
Width	17.8mm per pole		17.8mm per pole	
Terminal	Lug type(cable up to 25mm <sup>2</sup> )	Dual type(Lug & Screw)	Lug type(cable up to 25mm <sup>2</sup> )	
<b>Auxiliary switch, AX</b>	 <p><b>1 changeover contact</b> 6A at 240VAC, 3A at 415VAC(AX) 6A at 230VAC, 3A at 415VAC(AL) 2A at 48VDC, 1A at 125VDC <b>Lug terminal</b> Cable capacity 2.5mm<sup>2</sup> <b>9mm wide</b></p>		 <p><b>1 changeover contact</b> 6A at 240VAC, 3A at 415VAC(AX/AL) 6A at 24VDC, 2A at 48VDC, 1A at 130VDC <b>Lug terminal</b> cable capacity 0.75~2.5mm<sup>2</sup> <b>8.8mm wide</b></p>	
Optional				
Dimension	See drawing 1		See drawing 2	
Characteristic curve	See curve 1		See curve 1	


Drawing 1 : Type BKN & BKN-c

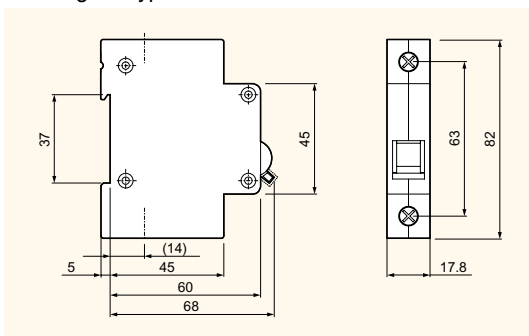

Drawing 2 : Type BKN-b

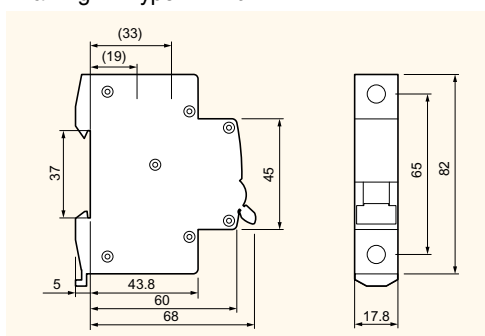


Drawing 3 : Type BKH

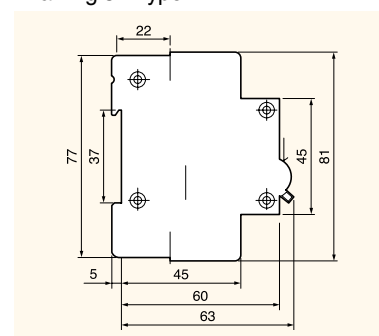




MCB		
BKH	BKP	BFN
Overload and short circuit	Overload and short circuit	Overload and short circuit
63, 80, 100A, 125A	3, 6, 10, 16, 20, 25, 32A	5, 10, 15, 20, 30, 40, 50A
C, D curve	B, C, D curve	1P, 2P, 3P
1p, 2p, 3p, 3p+N, 4p	1p+N	1P, 2P, 3P
1pole	2~4pole	
63A~125A 10kA at 230/400VAC	63A~125A 10kA at 400VAC	3A~32A 4.5kA at 230VAC
		5A~50A 10kA at 220/240VAC
IEC 60947-2	IEC 60898	IEC 60947-2
Thermal magnetic release	Thermal magnetic release	Thermal magnetic release
6000 operations	20000 operations	10000 operations
On 35mm DIN rail	On 35mm DIN rail	Plug-in
27mm per pole	17.8mm per pole	25mm per pole
Lug type(cable up to 50mm <sup>2</sup> )	Lug type(cable up to 10mm <sup>2</sup> )	Lug type (14-6 AWG.)
See drawing 3	See drawing 4	See drawing 5
See curve 1	See curve 1	See curve 2


Curve 1 : Type BKN, BKN-b, BKN-c, BKH, BKP, RKP, RKS

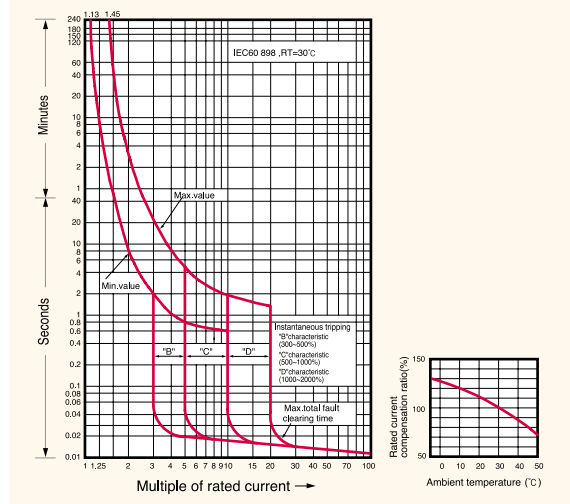


Curve 2 : Type BFN

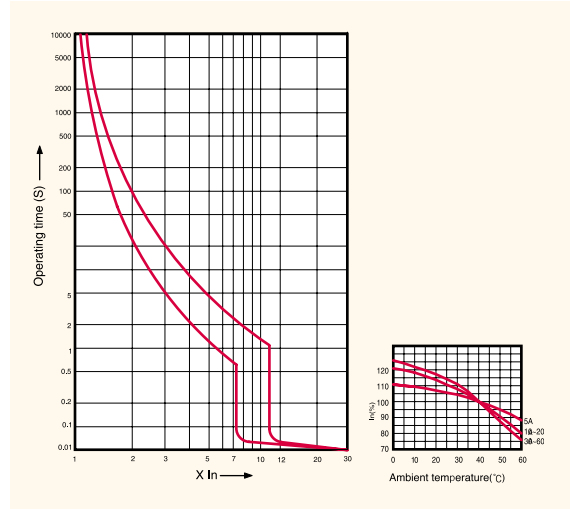

Drawing 4 : Type BKP

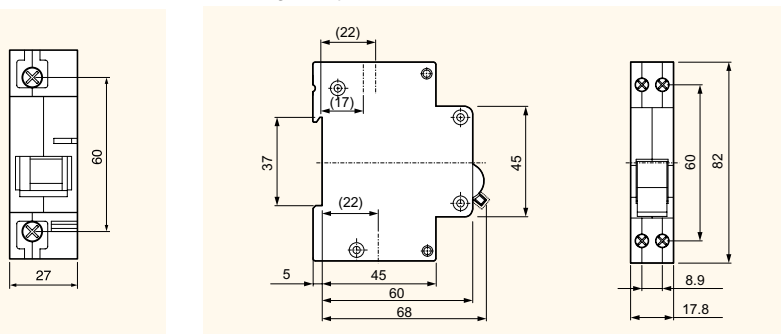

Drawing 5 : Type BFN

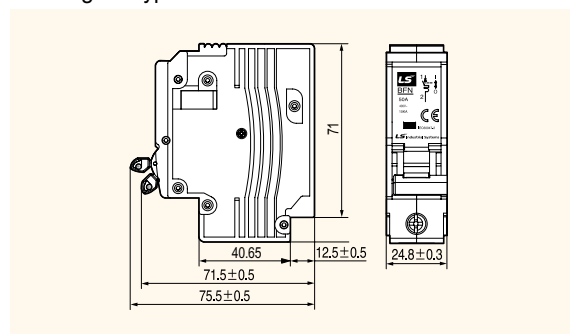


# Residual current circuit breakers


## 2 and 4 pole series up to 63AF

Type	RCBO							
	RKP	RKS	RKS-b	32KGRc	32KGRd	32GRhc	32GRhd	
Protection	Ground fault and overcurrent		Ground fault and overcurrent		Ground fault and overcurrent		Ground fault and overcurrent	
Rated current, I <sub>n</sub>	3(C,D),6,10,16,20,25,32A (B,C,D curve)		6, 10, 16, 20, 25, 32A (B, C curve)		15, 20, 30A		15, 20, 30A	
Rated residual current								
Operating, I <sub>Δn</sub>	30, 100, 300mA(non-adjustable)		30, 100mA(non-adjustable)		15, 30mA(non-adjustable)		15, 30mA(non-adjustable)	
Non-operating, I <sub>Δno</sub>	0.5I <sub>Δn</sub>		0.5I <sub>Δn</sub>		0.5I <sub>Δn</sub>		0.5I <sub>Δn</sub>	
Number of poles	1P+N		1P+N		2 pole		2 pole	
Rated voltage	230VAC		230VAC		110/220VAC		110/220VAC	
Residual current off-time	≤0.1 sec.		≤0.3 sec.		≤0.03 sec.		≤0.03 sec.	
Standard	IEC 61009		IEC 61009		KS		KS	
Type of trip								
Ground fault	Electronic		Electronic		Electronic		Electronic	
Overcurrent	Thermal-magnetic		Thermal-magnetic		Bimetallic		Bimetallic	
Breaking capacity	4.5kA		10kA		1.5kA    2.5kA		1.5kA    2.5kA	
Conditional short circuit capacity	-		-		-		-	
Electrical endurance	20000 operations		≤ 4000 operations		6000 operations		6000 operations	
Mount	On 35mm DIN rail		On 35mm DIN rail		On 35mm DIN rail / Screw		On 35mm DIN rail / Screw	
Width	35.6mm		18mm		35mm		33mm	
Terminal	Lug type (cable up to 10mm <sup>2</sup> )		Lug type (cable up to 10mm <sup>2</sup> )		Screw clamp type (cable up to 5.5mm <sup>2</sup> )		Screw clamp type (cable up to 5.5mm <sup>2</sup> )	
Type of operation	-		-		-		-	
Dimension	See drawing 1		See drawing 2    See drawing 3		See drawing 4		See drawing 5	
Characteristic curve	See page 5(Curve 1)		See page 5(Curve 1)		Curve 3		Curve 4	


Drawing 1: Type RKP

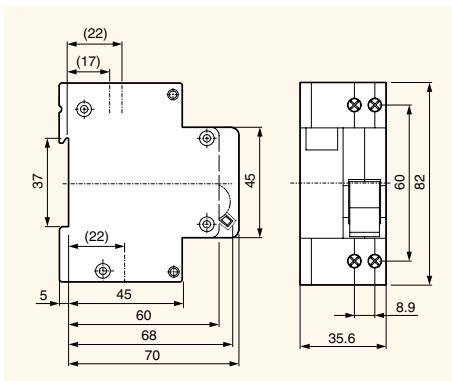


Drawing 2: Type RKS

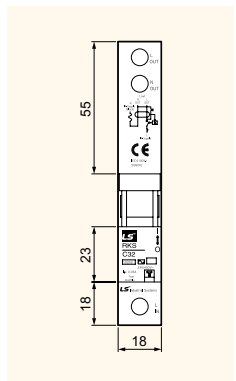


Drawing 3: Type RKS-b

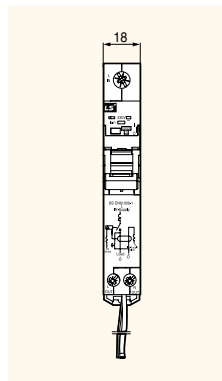


Drawing 4: Type 32KGRc & 32KGRd

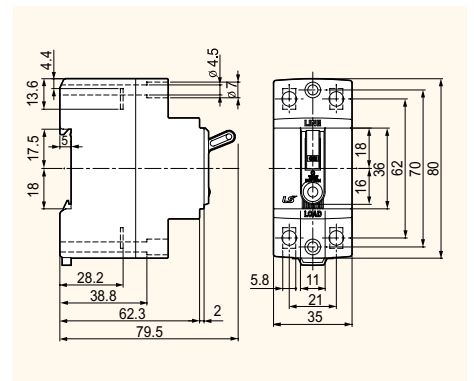


Drawing 5: Type 32GRhc & 32GRhd

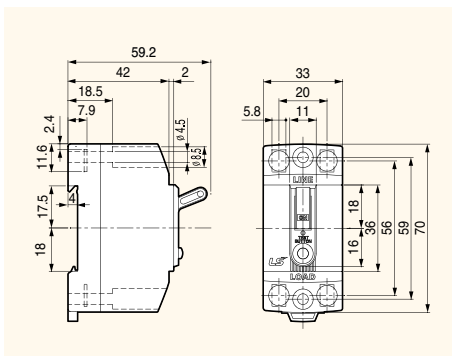

Drawing 6: Type RKN

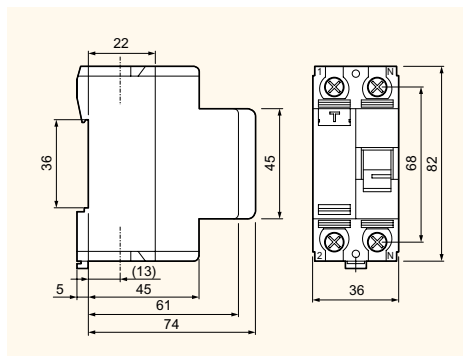

Drawing 7: Type RKN-b

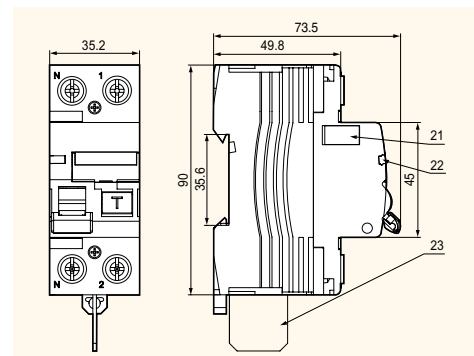





RCCB	
RKN	RKN-b
Ground fault	
25, 32, 40, 63A	25, 32, 40, 63, 80, 100A
30, 100, 300mA(non-adjustable)	
0.5I <sub>Δn</sub>	
1P+N, 3P+N	
230VAC(1P+N), 230/415VAC(3P+N)	
≤0.1 sec.	
IEC 61008	
Electro-magnetic	
N.A	
-	
6kA	10kA
6000 operations	
On 35mm DIN rail	
18mm	
Lug type (cable up to 35mm <sup>2</sup> )	
A/AC	
See drawing 6	See drawing 7
-	

Isolator	
Type	BKD
Rated current, I <sub>n</sub>	40, 50, 63, 80, 100, 125A
Number of poles	1p, 2p, 3p, 4p
Rated voltage	240/415VAC
Standard	IEC 60947-3
Electrical endurance	40, 50, 63A: 20000 operations 80, 100, 125A: 10000 operations
Mount	On 35mm DIN rail
Width	17.8mm per pole
Terminal	Lug type(cable up to 50mm <sup>2</sup> )
Dimension	See drawing 8


Drawing 8: Type BDK

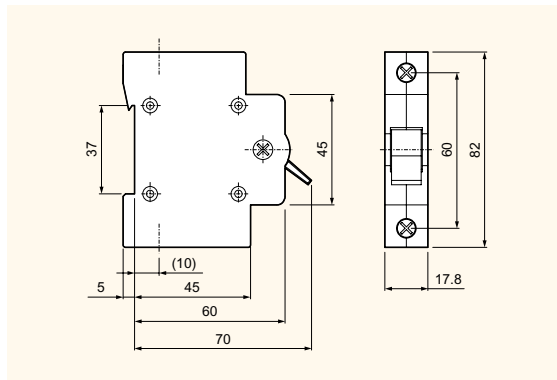

Curve 3 : Type 32KGRc, 32KGRd

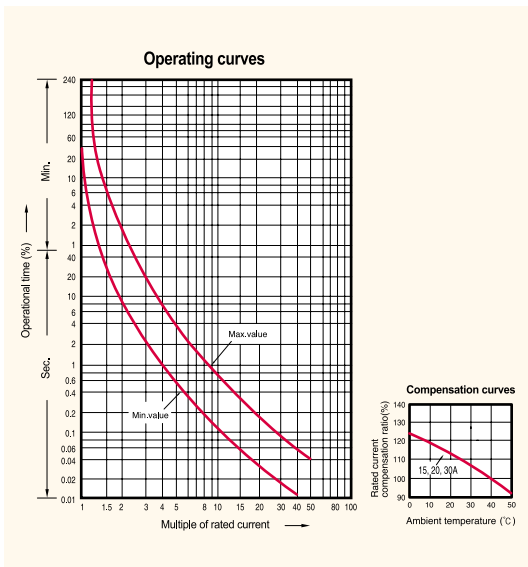

Curve 4 : Type 32GRhc, 32GRhd

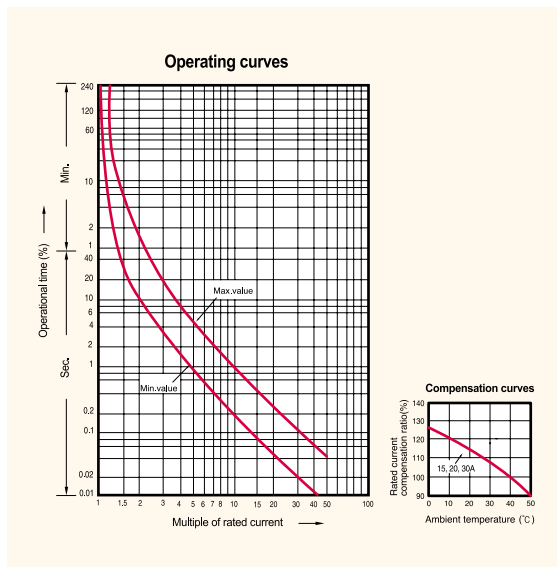

# Surge Protective Device

## BKS Series Din-rail type

### Product description


The BKS surge protective device is applied to the alternating current 50/60Hz, 220V/380V power system and provides the protection from the surge overvoltage of an electric system.

Moreover, it is the protection element (MOV) replacement type and is the product with convenience and economic efficiency.


However, only the protection module is provided so that separate components have to be combined according to the site conditions.

If the protective device is normal, the display becomes green. The display becomes red after operation (abnormal or after an accident).

### Product rating

Type	BKS-A	BKS-B	BKS-C	BKS-D	BKS-E	BKS-G	BKS-M
Pole	1, 2, 3, 4 Pole						
Rated system voltage $U_n$ (Applied Voltage)	AC 220V	AC 220V	AC 220V	AC 380V	AC 380V	AC 380V	AC 380V
Maximum continuous operating voltage $U_c$ (MCOV, The voltage applied to the surge protective device)	AC 320V	AC 320V	AC 320V	AC 420V	AC 460V	AC 320V	AC 275V
Voltage protection level $U_p$ (The voltage level with the surge suppressed)	$\leq 1.2kA$	$\leq 1.5kA$	$\leq 1.5kA$	$\leq 2.0kA$	$\leq 2.5kA$	$\leq 1.5kA$	$\leq 2.5kA$
Maximum discharge current $I_{max}(8/20\mu s)$ kA	10kA	20kA	40kA	60kA	100kA	40kA	100kA
Response time ns	< 25 ns						
Usable ambient temperature $^{\circ}C$	-40 ~ +80 $^{\circ}C$						
Usable frequency Hz	50/60 Hz						
Attachment type	DIN-rail attachment type						
Operation status indication window	Normal operation: Green, Abnormal/After an accident: Red						
Product color and shape							
Min. terminal connection (mm <sup>2</sup> )	1 Phase and Neutral 2.5, Earth 4						
Protection class	Class III			Class II			
Alarm Contact	No	No	No	No	No	Yes	Yes

\* The surge protective device starts to operate above the maximum continuous operating voltage  $U_c$  (MCOV).

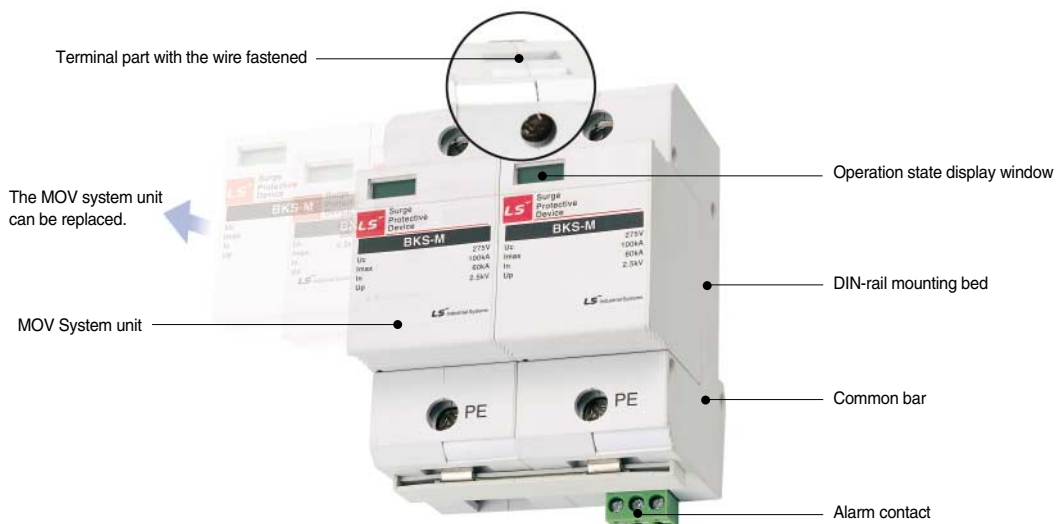



# SP Series




## Box type

The SP series surge protective device is applied to the alternating current 50/60Hz, 220V/380V power system and provides the protection from the surge overvoltage of an electric system.

Moreover, the protection module, disconnectable device (fuse), and fastened power and ground wires are organized into the all-in-one steel cabinet with convenient installation and stability.



If the protective device is normal, the display becomes green. The display becomes red after operation (abnormal or after an accident).

### Product rating-Single phase 2W+G (SPL)

Type	SPL-110S 20kA	SPL-220S 40kA	SPL-220S 80kA
Pole	2W+G	2W+G	2W+G
Rated system voltage $U_n$ (Applied Voltage)	AC 110V/220V	AC 220V	AC 220V
Maximum continuous operating voltage $U_c$ (MCOV, The voltage applied to the surge protective device)	AC 320V	AC 320V	AC 320V
Voltage protection level $U_p$ (The voltage level with the surge suppressed)	$\leq 1.5kV$	$\leq 1.5kV$	$\leq 1.5kV$
Maximum discharge current $I_{max}(8/20\mu s)$ kA	20kA	40kA	80kA
Response time ns	$< 5$ ns		
Usable ambient temperature $^{\circ}C$	$-40 \sim +70^{\circ}C$		
Usable frequency Hz	50/60 Hz		
Attachment type	Screw attachment type		
Operation status indication window	Normal operation: Green LED lighting, Abnormal/After an accident: Red lighting		
Dimension(W×H×D)	60×87×47	68×90×70	95×117×68
Product color and shape			
Protection class	Class III	Class II / Class III	Class II / Class III

< BKS-A,C,E >

< BKS-G,M >

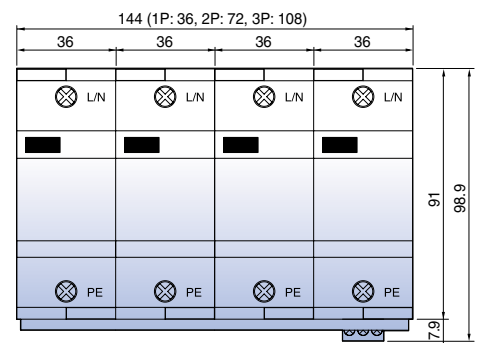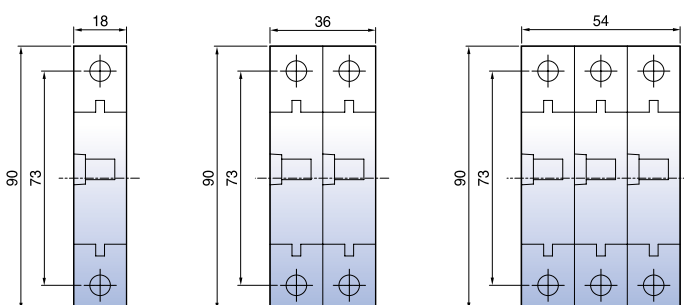


# Surge Protective Device


## SP Series

### Box type


#### Product rating-Three phase 3W+G (SPT) AC 380V

Type	SPT-380S 40kA	SPT-380S 80kA	SPT-380S 120kA	SPT-380S 160kA
<b>Pole</b>	3W+G	3W+G	3W+G	3W+G
<b>Rated system voltage Un</b> (Applied Voltage)	AC 380V	AC 380V	AC 380V	AC 380V
<b>Maximum continuous operating voltage Uc</b> (MCOV, The voltage applied to the surge protective device)	AC 320V	AC 320V	AC 320V	AC 320V
<b>Voltage protection level Up</b> (The voltage level with the surge suppressed)	≤ 2.0kV	≤ 2.0kV	≤ 2.0kV	≤ 2.0kV
<b>Maximum discharge current I<sub>max</sub>(8/20<math>\mu</math>s) kA</b>	40kA	80kA	120kA	160kA
<b>Response time ns</b>	< 5 ns			
<b>Usable ambient temperature °C</b>	-40 ~ +70 °C			
<b>Usable frequency Hz</b>	50/60 Hz			
<b>Attachment type</b>	Screw attachment type			
<b>Operation status indication window</b>	Normal operation: Green LED lighting, Abnormal/After an accident: Red lighting			
<b>Dimension(W×H×D)</b>	113×160×80	130×160×80	160×190×86	160×190×86
<b>Product color and shape</b>				
<b>Protection class</b>	Class II / Class III		Class I / Class II / Class III	

#### Product rating-Three phase 3W+G (SPT) AC 440V

Type	SPT-440S 40kA	SPT-440S 80kA	SPT-440S 120kA	SPT-440S 160kA
<b>Pole</b>	3W+G	3W+G	3W+G	3W+G
<b>Rated system voltage Un</b> (Applied Voltage)	AC 440V	AC 440V	AC 440V	AC 440V
<b>Maximum continuous operating voltage Uc</b> (MCOV, The voltage applied to the surge protective device)	AC 320V	AC 320V	AC 320V	AC 320V
<b>Voltage protection level Up</b> (The voltage level with the surge suppressed)	≤ 2.0kV	≤ 2.0kV	≤ 2.0kV	≤ 2.0kV
<b>Maximum discharge current I<sub>max</sub>(8/20<math>\mu</math>s) kA</b>	40kA	80kA	120kA	160kA
<b>Response time ns</b>	< 5 ns			
<b>Usable ambient temperature °C</b>	-40 ~ +70 °C			
<b>Usable frequency Hz</b>	50/60 Hz			
<b>Attachment type</b>	Screw attachment type			
<b>Operation status indication window</b>	Normal operation: Green LED lighting, Abnormal/After an accident: Red lighting			
<b>Dimension(W×H×D)</b>	113×160×80	130×160×80	160×190×86	160×190×86
<b>Product color and shape</b>				
<b>Protection class</b>	Class II / Class III		Class I / Class II / Class III	

## Product rating-Three phase 4W+G (SPY)

Type	SPY-220S 40kA	SPY-220S 80kA	SPY-220S 120kA	SPY-220S 160, 200, 240kA
<b>Pole</b>	4W+G	4W+G	4W+G	4W+G
<b>Rated system voltage Un</b> (Applied Voltage)	AC 220/380V	AC 220/380V	AC 220/380V	AC 220/380V
<b>Maximum continuous operating voltage Uc</b> (MCOV, The voltage applied to the surge protective device)	AC 320V	AC 320V	AC 320V	AC 320V
<b>Voltage protection level Up</b> (The voltage level with the surge suppressed)	≤ 2.0kV	≤ 2.0kV	≤ 2.0kV	≤ 2.0kV
<b>Maximum discharge current I<sub>max</sub>(8/20μs) kA</b>	40kA	80kA	120kA	160, 200, 240kA
<b>Response time ns</b>	< 5 ns			
<b>Usable ambient temperature °C</b>	-40 ~ +70 °C			
<b>Usable frequency Hz</b>	50/60 Hz			
<b>Attachment type</b>	Screw attachment type			
<b>Operation status indication window</b>	Normal operation: Green LED lighting, Abnormal/After an accident: Red lighting			
<b>Dimension(W×H×D)</b>	130×160×80	130×160×80	160×190×86	160×190×86
<b>Product color and shape</b>				
<b>Protection class</b>	Class II / Class III		Class I / Class II / Class III	



# Contactors & Overload relays

## Metasol MC 3P 18 to 100A

### MC type Magnetic Contactors



Frame size			18AF				22AF				
Type	screws clamp terminals		MC-6a	MC-9a	MC-12a	MC-18a	MC-9b	MC-12b	MC-18b	MC-22b*	
Number of poles			3pole				3pole				
Rated operational voltage, Ue			690V				690V				
Rated insulation voltage, Ui			690V				690V				
Rated frequency			50/60Hz				50/60Hz				
Rated impulse withstand voltage, Uimp			6kV				6kV				
Maximum operating rate in operating cycles per hour(AC3)			1800 operations per hour				1800 operations per hour				
Durability	Mechanical		15 mil. operations				15 mil. operations				
	Electrical		2.5 mil. operations				2.5 mil. operations				
Current and power	AC-1, Thermal current	A	25	25	25	32	25	25	32	40	
		AC-3	200/240V	kW	2.2	2.5	3.5	4.5	2.5	3.5	4.5
			A	9	11	13	18	11	13	18	22
		380/440V	kW	3	4	5.5	7.5	4	5.5	7.5	11
			A	7	9	12	18	9	12	18	22
		500/550V	kW	3	4	7.5	7.5	4	7.5	7.5	15
			A	6	7	12	13	7	12	13	20
		690V	kW	3	4	7.5	7.5	4	7.5	7.5	15
		A	4	5	9	9	6	9	9	18	
UL rating (50/60Hz)	Continuous current		A	25	25	25	32	25	25	40	40
	Single phase	110~120V	HP	0.5	0.5	0.75	1	0.5	0.75	1	2
		220~240V	HP	1.5	1.5	2	3	1.5	2	3	3
	Three phase	200~208V	HP	2	2	3	5	2	3	5	7.5
		220~240V	HP	3	3	5	7.5	3	5	7.5	10
		440~480V	HP	5	5	7.5	10	5	7.5	10	15
		550~600V	HP	7.5	7.5	10	15	7.5	10	15	20
NEMA size			00	00	0	0	00	00	0	1	
Size and weight	AC control	Weight	0.33				0.34				
		Size(W × H × D)	45 × 73.5 × 80.4				45 × 73.5 × 87.4				
	DC control	Weight	0.5				0.51				
		Size(W × H × D)	45 × 73.5 × 110.7				45 × 73.5 × 117.7				
Auxiliary(standard)			1a or 1b				1a1b				
Auxiliary	Side mount		UA-1				UA-1				
	Front mount		UA-2, UA-4				UA-2, UA-4				

Note) Minimum conduct current of Auxiliary contactor is DC 17V 5mA.

### MT type Thermal Overload Relays



Type	Screws clamp terminals		MT-12/□		MT-32/□	
Rated operational voltage, Ue			690V		690V	
Rated insulation voltage, Ui			690V		690V	
Rated impulse withstand voltage, Uimp			6kV		6kV	
Trip class			10A, 20		10A, 20	
Setting range			0.1~18A		0.1~40A	
Size and weight	Weight	kg	0.1		0.17	
		Size(W × H × D)	45 × 73.2 × 63.7		45 × 75 × 90	

\* The safety cover of magnetic contactor and thermal overload relay is optional.



### 40AF

MC-32a	MC-40a
●	●
3pole	
690V	
1000V	
50/60Hz	
8kV	
1800 operations per hour	
12 mil. operations	
2 mil. operations	
50	60
7.5	11
32	40
15	18.5
32	40
18.5	22
28	32
18.5	22
20	23
50	60
2	3
5	7.5
7.5	15
10	15
20	30
25	30
1	1
0.4	
45 × 83 × 90	
0.6	
45 × 83 × 117.1	
UA-1	
UA-2, UA-4	



### MT-32/□

●
690V
690V
6kV
10A, 20
0.1~40A
0.17
45 × 75 × 90



### 65AF

MC-50a	MC-65a
●	●
3pole	
690V	
1000V	
50/60Hz	
8kV	
1800 operations per hour	
12 mil. operations	
2 mil. operations	
70	100
15	18.5
55	65
22	30
50	65
30	33
43	60
30	33
28	35
70	100
3	5
10	15
20	25
25	30
40	50
50	60
2	2
0.9	
55 × 106 × 119	
1.2	
55 × 106 × 146.4	
UA-1	
UA-2, UA-4	



### MT-63/□

●
690V
690V
6kV
10A, 20
4~65A
0.31/0.33
55 × 81 × 100



### 100AF

MC-75a	MC-85a	MC-100a
●	●	●
3pole		
690V		
1000V		
50/60Hz		
8kV		
1800 operations per hour		
12 mil. operations		
2 mil. operations		
110	135	160
22	25	30
75	85	105
37	45	55
75	85	105
37	45	55
64	75	85
37	45	55
42	45	65
110	135	160
5	7.5	10
15	15	20
25	30	30
30	40	40
50	60	75
60	75	75
2	3	3
1.6		
70 × 140 × 135.8		
2.6		
70 × 140 × 172.3		
UA-1		
UA-2, UA-4		



### MT-95/□

●
690V
690V
6kV
10A, 20
7~100A
0.48/0.5
70 × 97 × 110



# Contactors & Overload relays

## Metasol MC 3P 150 to 800A

### MC type Magnetic Contactors



Frame size			150AF		225AF	
Type	screws clamp terminals		MC-130a	MC-150a	MC-185a	MC-225a
Number of poles			3pole		3pole	
Rated operational voltage, Ue			690V		690V	
Rated insulation voltage, Ui			1000V		1000V	
Rated frequency			50/60Hz		50/60Hz	
Rated impulse withstand voltage, Uimp			8kV		8kV	
Maximum operating rate in operating cycles per hour(AC3)			1200 operations per hour		1200 operations per hour	
Durability	Mechanical		5 mil. operations		5 mil. operations	
	Electrical		1 mil. operations		1 mil. operations	
Current and power	AC-1, Thermal current	A	160	210	230	275
		AC-3	37	45	55	75
	200~240V	kW	130	150	185	225
		A	60	75	90	132
	380/440V	kW	130	150	185	225
		A	60	70	110	132
	500/550V	kW	90	100	180	200
		A	55	55	110	140
690V	kW	60	60	120	150	
	A	60	60	120	150	
UL rating (50/60Hz)	Continuous current		160	210	230	275
	Single phase	110~120V	10	15	15	15
		220~240V	20	25	30	40
	200~208V	HP	40	40	60	60
		HP	40	50	60	75
	Three phase	220~240V	75	100	125	150
		440~480V	75	75	125	150
550~600V	HP	3	4	4	4	
Size and weight	AC control	Weight	2.4		5.4	
		Size(W × H × D)	95 × 158 × 132		138 × 203 × 181	
		DC control	2.3			
Auxiliary(standard)	Side mount	Weight	95 × 158 × 132			
		Size(W × H × D)				
		Front mount				
Auxiliary	Side mount		UA-1		2a2b	
	Front mount		UA-2, UA-4		AU-100 (Max.4NO4NC)	
					-	

### MT type Thermal Overload Relays



Type	Screws clamp terminals		MT-150/□	MT-225/□
Rated operational voltage, Ue			690V	690V
Rated insulation voltage, Ui			690V	690V
Rated impulse withstand voltage, Uimp			6kV	6kV
Trip class			10A, 20	10A, 20
Setting range			34~150A	65~240A
Size and weight	Weight	kg	0.67	2.5
		Size(W × H × D)	95 × 109 × 113	147 × 141 × 184

\* The safety cover of magnetic contactor and thermal overload relay is optional.



400AF		
MC-265a	MC-330a	MC-400a
●	●	●
	3pole	
	690V	
	1000V	
	50/60Hz	
	8kV	
1200 operations per hour		
5 mil. operations		2.5 mil. operations
1 mil. operations		0.5 mil. operations
300	350	450
80	90	125
265	330	400
147	160	200
265	330	400
147	160	225
225	280	350
160	200	250
185	225	300
300	350	450
-	-	-
-	-	-
75	100	125
100	125	150
200	250	300
200	250	300
5	5	5

9.2  
163 × 243 × 198

2a2b
AU-100 (Max.4NO4NC)
-



MT-400/□
●
690V
690V
6kV
10A, 20
85~400A
2.6
151 × 171 × 198



800AF		
MC-500a	MC-630a	MC-800a
●	●	●
	3pole	
	690V	
	1000V	
	50/60Hz	
	8kV	
1200 operations per hour		
	2.5 mil. operations	
	0.5 mil. operations	
580	660	900
147	190	220
500	630	800
265	330	440
500	630	800
265	330	500
400	500	720
300	400	500
380	420	630
580	660	900
-	-	-
-	-	-
150	200	200
200	250	300
400	500	600
400	500	600
6	6	7

22.4  
285 × 312 × 242

2a2b
AU-100 (Max.4NO4NC)
-



MT-800/□
●
690V
690V
6kV
10A, 20
200~800A
11.5
360 × 530 × 212

# Contactors & Overload relays

## Metasol MC 4P 18 to 85A

### MC type Magnetic Contactors



Frame size			
Type	Screw clamp terminal		
Number of poles	4		
Rated operational voltage (Ue)	690V		
Rated insulation voltage (Ui)	690V		
Rated frequency	50/60Hz		
Rated impulse withstand voltage, Uimp	6kV		
Maximum operating rate in operating cycles per hour(AC1)	1800 operations per hour		
Durability	Mechanical		
	Electrical		
Current and Power	Thermal current	A	
	AC-1	200/240V	kW
			A
	380/400V	kW	
			A
	500/550V	kW	
		A	
690V	kW		
		A	
UL rating (50/60Hz)	Continuous current		
	Single	110~120V	HP
		220~240V	HP
	Phase	200~208V	HP
	Three	220~240V	HP
440~480V		HP	
Phase	550~600V	HP	
NEMA Size			
Size and weight	AC	Weight	kg
	Control	Size(W×H×D)	mm
	DC	Weight	kg
Control	Size(W×H×D)	mm	
Auxiliary(standard)			
Auxiliary	Side Mount		
	Front Mount		



18AF			
MC-6a/4	MC-9a/4	MC-12a/4	MC-18a/4
●			
4pole			
690V			
690V			
50/60Hz			
6kV			
1800 operations per hour			
15 mil. Operations			
0.5 mil. Operations		0.8 mil. Operations	
25	25	25	40
9	9	9	15
25	25	25	40
17	17	17	27
25	25	25	40
21	21	21	35
25	25	25	40
27	27	27	44
25	25	25	40
25	25	25	32
0.5	0.5	0.75	1
1.5	1.5	2	3
2	2	3	5
3	3	5	7.5
5	5	7.5	10
7.5	7.5	10	15
00	00	0	0
0.33			
45×73.5×79			
0.5			
45×73.5×110.7			
-			
UA-1			
AU-2, AU-4			



22AF
MC-22a/4
●
4pole
690V
690V
50/60Hz
6kV
1800 operations per hour
15 mil. Operations
1 mil. Operations
40
15
40
27
40
35
40
44
40
32
2
3
7.5
7.5
10
15
1
0.4
47.2×80×86.8
0.5
47.2×80×113.2
-
AU-1
AU-2, AU-4

40AF	
MC-32a/4	MC-40a/4
●	
4pole	
690V	
690V	
50/60Hz	
6kV	
1800 operations per hour	
15 mil. Operations	
1 mil. Operations	
50	60
18	22
50	60
35	42
50	60
43	52
50	60
55	66
50	60
45	50
2	3
5	5
7.5	10
10	10
20	25
20	25
1	1
0.59	
59×83.5×94.5	
0.7	
59×83.5×121	
-	
AU-1	
AU-2, AU-4	

85AF			
MC-50a/4	MC-65a/4	MC-75a/4	MC-85a/4
●			
4pole			
690V			
1000V			
50/60Hz			
8kV			
1800 operations per hour			
12 mil. Operations			
1 mil. Operations			
80	100	110	135
30	37	41	51
80	100	110	135
56	70	76	95
80	100	110	135
70	88	97	120
80	100	110	135
88	110	120	150
80	100	110	135
70	80	90	100
3	5	5	7.5
7.5	10	15	15
10	15	20	25
15	20	25	30
30	40	50	50
30	40	50	50
2	2	2	3
1.2			
91×123.5×117.8			
1.29			
91×123.5×117.8			
-			
AU-1			
AU-2, AU-4			

# Contactors & Overload relays

## Metasol MC 4P 225 to 800A

### MC type Magnetic Contactors



Frame size			
Type	Screw clamp terminal		
Number of poles	4		
Rated operational voltage (Ue)	690V		
Rated insulation voltage (Ui)	1000V		
Rated frequency	50/60Hz		
Rated impulse withstand voltage, Uimp	8kV		
Maximum operating rate in operating cycles per hour(AC1)	1200 operations per hour		
Durability	Mechanical		
	Electrical		
Current and Power	Thermal current	A	
	AC-1	200/240V	kW
			A
	380/400V	kW	
			A
	500/550V	kW	
		A	
690V	kW		
		A	
UL rating (50/60Hz)	Continuous current		
	Single	110~120V	HP
		Phase	220~240V
		200~208V	HP
	Three	220~240V	HP
		Phase	440~480V
		550~600V	HP
NEMA Size			
Size and weight	AC	Weight	kg
	Control	Size(W×H×D)	mm
	DC	Weight	kg
		Control	Size(W×H×D)
Auxiliary(standard)			
Auxiliary	Side Mount		
	Front Mount		



225AF				
MC-100a/4	MC-130a/4	MC-150a/4	MC-185a/4	MC-225a/4
●				
4pole				
690V				
1000V				
50/60Hz				
8kV				
1200 operations per hour				
5 mil. Operations				
0.8 mil. Operations				
160	165	250	300	330
57	60	76	87	100
150	155	200	230	260
106	110	142	165	185
150	155	200	230	260
132	137	180	205	230
150	155	200	230	260
165	170	225	255	290
150	155	200	230	260
160	160	210	230	275
7.5	10	15	15	15
15	20	25	30	40
30	40	40	60	60
30	40	50	60	75
60	75	100	125	150
60	75	100	125	150
3	3	4	4	4
5.6				
175×203×185				
2a2b				
AU-100				
-				

\* - FLA = 722 A, LRA = 5618 A

\*\* - FLA = 566 A, LRA = 4495 A





### 400AF

MC-265a/4	MC-330a/4	MC-400a/4
	●	
	4pole	
	690V	
	1000V	
	50/60Hz	
	8kV	
	1200 operations per hour	
	2.5 mil. Operations	
	0.5 mil. Operations	
360	420	500
115	135	160
300	350	420
215	250	300
300	350	420
265	315	375
300	350	420
335	390	470
300	350	420
300	350	450
-	-	-
-	-	-
75	100	125
100	125	150
200	250	300
200	250	300
5	5	5

9.9

206 × 243 × 205

2a2b

AU-100

-



### 800AF

MC-500a/4	MC-630a/4	MC-800a/4
	●	
	4pole	
	690V	
	1000V	
	50/60Hz	
	8kV	
	1200 operations per hour	
	2.5 mil. Operations	
	0.5 mil. Operations	
630	750	900
245	255	310
630	660	800
450	470	570
630	660	800
560	590	710
630	660	800
710	740	900
630	660	800
580	660	900
-	-	-
-	-	-
150	200	200
200	250	300
400	500	600 *
400	500	600 **
6	6	7

26.3

346 × 310 × 244

2a2b

AU-100

-

# Mini contactors

## 6 to 16A

### Mini contactors

3NO main contacts  
1 auxiliary contacts



Screw clamp type



Fast-on type



Cage clamp type



Solder pin type

Frame size		6A	9A	12A	16A				
Screw clamp type	AC coil	GMC-6M	GMC-9M	GMC-12M	GMC-16M				
	DC coil	GMD-6M	GMD-9M	GMD-12M	GMD-16M				
Fast-on type	AC coil	GMC-6MF	GMC-9MF	GMC-12MF	GMC-16MF				
	DC coil	GMD-6MF	GMD-9MF	GMD-12MF	GMD-16MF				
Cage clamp type	AC coil	GMC-6MC	GMC-9MC	GMC-12MC	GMC-16MC				
	DC coil	GMD-6MC	GMD-9MC	GMD-12MC	GMD-16MC				
Solder pin type	AC coil	GMC-6MP	GMC-9MP	GMC-12MP	GMC-16MP				
	DC coil	GMD-6MP	GMD-9MP	GMD-12MP	GMD-16MP				
Ratings / IEC60947-4		kW	A	kW	A	kW	A	kW	A
AC1		20		20		20		20	
AC3	200/240V	1.5	7	2.2	9	3	12	4	15
	380/440V	2.2	6	4	9	5.5	12	7.5	16
	500/550V	3	5	3.7	6	4	7	5.5	9
	690V	3	4	4	5	4	5	4	5
Ratings / UL508		hp	A	hp	A	hp	A	hp	A
continuous current		I <sub>th</sub> = 20A (maximum for cage clamp type is 10A)							
single phase	120V	1/2		1/2		1 *		-	
	230V/240V	1		1.5		2 **		-	
three phase	240V	1.5		3		3		-	
	480V	3		5		7.5 ***		-	
	600V	3		5		7.5		-	
Wire Range : Copper, 75°C, Stranded, 18-12AWG									
NEMA size		00		00		00		0	

Additional auxiliary contacts	Screw clamp type	Fast-on type	Cage clamp type	Solder pin type
2-pole, Front mount	AU-2M	AU-2MF	AU-2MC	
4-pole, Front mount	AU-4M	AU-4MF	AU-4MC	
2-pole, Side mount	AU-1M	AU-1MF	AU-1MC	

Note) \* = 1/2 for cage clamp type, \*\* = 1.5hp for cage clamp type, \*\*\* = 5hp for cage clamp type  
16AF : not approved from UL

### Overload Relays

Bimetallic style Type GT		Setting ranges (A)	0.1 - 0.16 0.16 - 0.25 0.25 - 0.4 0.4 - 0.63 0.63 - 1 1 - 1.6 1.6 - 2.5 2.5 - 4	4 - 6 5 - 8 6 - 9 7 - 10 9 - 13 12 - 16	
	Differential	GTK-12M			
	Non-differential (3-heater)	GTH-12M/3			
	Non-differential (2-heater)	GTH-12M			

# Digital motor protection relay



DMP□-S/Sa



DMP□-T/Ta



Model No.			DMP06-S/Sa	DMP60-S/Sa	DMP06-T/Ta	DMP60-T/Ta
Wiring			Screw type		Tunnel type	
Panel mount			Unit or Extension <small>Note1)</small>			
Operation time			Select either reverse time characteristics or definite time characteristics			
Protection	Over current		According to the setting time			
	Phase failure		3 sec.			
	Reverse phase		Within 0.1 sec.			
	Asymmetry		5 sec.			
	Stall		5 sec.			
	Lock		Within 0.5 sec.			
	Under current		3 sec.			
	Ground fault		Within 0.05~1 sec. Selectable (0.05~1.0sec)			
	Short circuit <small>Note2)</small>		Within 50ms			
Alarm			Variable (60~110% of the setting current)			
Current setting range (A)			0.5~6	5~60	0.5~6	5~60
Motor capacity (kW)	220~240V		0.09~0.75	1.1~11	0.09~0.75	1.1~11
	380~440V		0.12~1.5	2.2~22	0.09~1.5	2.2~22
Time setting range (sec)	Definite time	Delay in starting	0~60sec			
		Delay in operating	0~30sec			
	Inverse time		0~60sec			
	Reset		Manual reset			
Tolerance	Current		±5%			
	Time		±5% (or ±0.5sec)			
Operating power <small>Note3)</small>	Voltage		AC 190~250V			
	Frequency		60Hz (50Hz)			
Aux. contact	OL	2-SPST	3A/250Vac Resistive load			
	AL	SPST	3A/250Vac Resistive load			
Insulation resistance			Over DC500V 100MΩ			
Surge impulse voltage(IEC1000-4-5)			1.2 × 50 <sub>μs</sub> 6kV (Apply standard wave form)			
Fast transient burst(IEC1000-4-4)			2.5kV/5min			
Environment	Temperature	Operation	-25~70 °C			
		Storage	-30~80 °C			
	Humidity		30~90% RH (No freezing)			
Display	7-Segment		3 phase current, cause of a fault			
	Bar-Graph		60~110% of real load current			
Mounting type			35mm Din-rail/Panel			

Note1) In extension type, the digital EMPR is calibrated with combining the display part and main body so, please cautious not to combine the display part and main body with different part No.

Note2) Instantaneous short circuit protection is optional

Note3) Operational voltage of AC 110V and 50Hz is optional

# Manual motor starters

## Quick selection table ... IEC rating



Frame			32AF																				
Type	Current adjustable type		MMS-32S								MMS-32H												
	Instantaneous type		-								MMS-32HI												
Breaking capacity			Standard								High breaking												
Handle Type			Toggle								Rotary												
Number of poles			3								3												
Rated operational voltage (Ue)			Up to 690V								Up to 690V												
Rated frequency			50/60 Hz								50/60 Hz												
Rated insulation voltage (Ui)			690V								690V												
Rated impulse voltage (Uimp)			6kV								6kV												
Utilization category	IEC 60 947-2 (Breaker)		Cat. A								Cat. A												
	IEC 60 947-4 (Motor starter)		AC 3								AC 3												
Mechanical endurance (Operating)			100,000								100,000												
Electrical endurance (Cycles)			100,000								100,000												
Max operating frequency per hour (Ope./h)			25								25												
Temperature compensation (Operation)			-20 ~ +60 °C								-20 ~ +60 °C												
Instantaneous short circuit release			13 × Ie max.								13 × Ie max.												
Overload protection			○								○												
Phase failure function			○								○												
Trip indicating function			×								×												
Test function			○								○												
Dimension(W×H×D)			45×105×54.4								45×105×60.3												
Weight (g)			320								360												
Rated breaking capacity (kA)	Rated operational current (Ie)	Thermal release Adjustment range (A)	220V 240V 230V		415V 400V		460V 440V		525V 500V		690V 600V		220V 240V 230V		415V 400V		460V 440V		525V 500V		690V 600V		
			Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	
	0.16	0.1~0.16	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	
	0.25	0.16~0.25	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	
	0.4	0.25~0.4	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	
	0.63	0.4~0.63	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	
	1	0.63~1	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	
	1.6	1~1.6	100	100	100	100	100	100	100	100	3	3	100	100	100	100	100	100	100	100	100	100	
	2.5	1.6~2.5	100	100	100	100	100	100	50	38	3	3	100	100	100	100	100	100	100	100	100	8	8
	4	2.5~4	100	100	100	100	50	38	15	11	3	3	100	100	100	100	100	100	100	100	100	8	8
	6	4~6	100	100	100	100	15	11	10	8	3	3	100	100	100	100	100	100	100	100	100	6	6
	8	5~8	100	100	100	100	15	11	10	8	3	3	100	100	100	100	50	38	50	38	6	6	
	10	6~10	100	100	50	38	15	11	6	5	3	3	100	100	100	100	50	38	50	38	6	6	
	13	9~13	100	100	50	38	10	8	6	5	3	3	100	100	100	100	50	38	42	32	6	6	
	17	11~17	50	38	20	15	10	8	6	5	3	3	100	100	50	38	20	15	10	8	4	4	
	22	14~22	40	30	15	11	8	6	6	5	3	3	100	100	50	38	20	15	10	8	4	4	
26	18~26	40	30	15	11	8	6	6	5	3	3	100	100	50	38	20	15	10	8	4	4		
32	22~32	30	22	15	11	6	4	5	4	3	3	100	100	50	38	20	15	10	8	4	4		
40	28~40	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
50	34~50	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
63	45~63	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
75	55~75	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
90	70~90	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
100	80~100	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		





# Molded case circuit breakers

## Susol MCCB 100AF to 800AF Series

		TE100	TE160	TD100	TD160						
Frame size	[AF]	100	160	100	160						
Rated current, I <sub>n</sub> *	[A]	16~100	100,125,160	16, 20, 25, 32, 40, 50, 63, 80, 100	1P: 16, 20, 25, 32, 40, 50, 63, 80, 100, 125, 160 2, 3P: 100, 125, 160						
No. of poles		3,4	3,4	2*, 3, 4	1, 2*, 3, 4						
Rated operational voltage, U <sub>e</sub>	AC	690	690	690	240(1P), 690						
	DC	500	500	500	250(1P), 500						
Rated impulse withstand voltage, U <sub>imp</sub>	[kV]			8	8						
Rated insulation voltage, U <sub>i</sub> [V]		8	8	750	750						
Rated ultimate short-circuit breaking capacity, I <sub>cu</sub>		S	N	S	N	N	H	L	N	H	L
AC 50/60Hz 220/240V	[kA]	50	85	50	85	85	100	200	30(1P) 85	50(1P) 100	200
	380/415V [kA]	37	50	37	50	50	85	150	50	85	150
	440/460V [kA]	25	37	25	37	50	70	130	50	70	130
	480/500V [kA]	18	25	18	25	30	50	65	30	50	65
	660/690V [kA]	6	8	6	8	5	8	10	5	8	10
DC	250V [kA]	37	50	37	50	42	65	100	16(1P) 42	25(1P) 65	100
	500V(2poles in series) [kA]	37	50	37	50	42	65	100	42	65	100
Rated service breaking capacity, I <sub>cs</sub>	[%I <sub>cu</sub> ]	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%
Rated short-circuit making capacity I <sub>cm</sub>											
AC 50/60Hz 220/240V	[kA]	105	187	105	187	187	220	440	105(1P) 187	105(1P) 220	440
	380/415V [kA]	77.7	105	77.7	105	105	187	330	105	187	330
	440/460V [kA]	52.5	77.7	52.5	77.7	105	154	286	105	154	286
	480/500V [kA]	36	52.5	36	52.5	63	105	143	63	105	143
	660/690V [kA]	9.2	13.6	9.2	13.6	8	14	17	8	14	17
Category of utilization		A	A	A	A						
Isolation behavior		●	●	●	●						
Trip unit (release)											
Thermal-Magnetic											
● fixed-thermal, fixed-magnetic	FTU	●	●	●	●				●		
● adjustable-thermal, fixed-magnetic	FMU	●	●	●	●				●***		
● adjustable-thermal, adjustable-magnetic	ATU	-	-	-	-				-		
● magnetic only	MTU	-	-	-	-				-		
Electronic											
● LSI	ETS	-	-	-	-				-		
● LSI	ETM	-	-	-	-				-		
Option	Earth-fault protection, I <sub>g</sub>	-	-	-	-				-		
	Zone selective interlocking, ZSI	-	-	-	-				-		
	Ammeter	-	-	-	-				-		
	Communication	-	-	-	-				-		
	Earth-leakage protection module	-	-	-	-				-		
Connection	fixed	front-connection	●	●	●	●	●	●	●	●	●
		rear-connection	●	●	●	●	●	●	●	●***	●***
	plug-in	front-connection	-	-	-	-	●	●	●	●***	●***
		rear-connection	-	-	-	-	●	●	●	●***	●***
Mechanical life	[operations]	25000	25000	25000	25000				25000		
Electrical life @ 415 V AC	[operations]	10000	10000	10000	10000				10000		
Basic dimensions, W×H×D (front connection)	1-pole	[mm]	-	-	-	-	-	-	-	-	35×140×86
	3-pole	[mm]	76×130×82	76×130×82	76×130×82	90×140×86	90×140×86	90×140×86	90×140×86	90×140×86	90×140×86
	4-pole	[mm]	101×130×82	101×130×82	101×130×82	120×140×86	120×140×86	120×140×86	120×140×86	120×140×86	120×140×86
Weight (front connection)	1-pole	[kg]	-	-	-	-	-	-	-	-	0.57
	3-pole	[kg]	1.05	1.05	1.05	1.5	1.5	1.5	1.5	1.5	1.5
	4-pole	[kg]	1.35	1.35	1.35	1.8	1.8	1.8	1.8	1.8	1.8
Reference standard		IEC60947-2	IEC60947-2	IEC60947-2	IEC60947-2				IEC60947-2		

Note) ● applicable or available

\* Applicable to MCCBs equipped with FTU, FMU, ATU  
\* 2 pole MCCB in 3pole frame size

\*\* 700A only available for TS800FTU  
\*\*\* Not applicable to 1pole

※ The trip unit ATU is available from 125A



# Molded case circuit breakers

## Susol MCCB 1600AF Series





### Electrical characteristics



Type			
Ampere frame			
Pole			
Rated current, (A)	In	-5~40°C	
		50°C	
		65°C	
Rated insulation voltage, (V)	Ui		
Rated impulse withstand voltage, (kV)	Uimp		
Rated operational voltage, (V)	Ue	AC50/60Hz	
		DC	
Rated short-circuit breaking capacity			
IEC60947-2 AC50/60Hz (sym)	Rated ultimate short-circuit breaking capacity, (kA) (Icu)	220/240V	
		380/415V	
		440/460V	
		480/500V	
		660/690V	
	DC	250V 2P	
		500V 2P	
		750V 3P	
	Rated service breaking capacity (Ics)	%Icu	
Rated short-circuit making capacity (kA) (Icw)	AC50/60Hz	1s	
		3s	
Overriding instantaneous protection	kA peak		
Isolation			
Category			
(Life cycle)	Mechanical life (operations)		
	Electrical life (operations)	440V	In/2
			In
		690V	In/2
	In		
Pollution degree			
Dimension (mm)	3-pole		
(H×W×D)	4-pole		
Weight (kg)	3-pole		
	4-pole		

TS1000			TS1250			TS1600	
TS1000			TS1250			TS1600	
1000			1250			1600	
3, 4			3, 4			3, 4	
800, 1000			1250			1600	
800, 1000			1250			1560	
800, 1000			1240			1420	
1000			1000			1000	
8			8			8	
690			690			690	
-			-			-	
N	H	L	N	H	N	H	
55	75	200	55	75	55	75	
50	70	150	50	70	50	70	
50	65	130	50	65	50	65	
40	50	100	40	50	40	50	
35	45	-	35	45	35	45	
-	-	-	-	-	-	-	
-	-	-	-	-	-	-	
-	-	-	-	-	-	-	
100%	75%	100%	100%	75%	100%	75%	
25		12	25		25		
-		-	-		-		
50		30	50		50		
○			○		○		
B		A	B		B		
10000		4000	10000		10000		
6000		4000	5000		5000		
5000		3000	4000		2000		
4000		3000	3000		2000		
2000		2000	2000		1000		
3			3		3		
			327×210×152.5				
			327×280×152.5				
			13				
			16.8				

## Overview

Classification	N type	A type	P type	S type
Externals				
Current protection	• L / S / I / G / Thermal	• L / S / I / G / Thermal • ZSI(Protective coordination)	• L / S / I / G / Thermal(Continuous) • ZSI(Protective coordination)	• P type
Other protection	-	• Earth leakage (Option)	• Earth leakage(Option) • Over/Under current • Over/Under frequency • Unbalance(Voltage/Current) • Reverse power	• P type
Measurement function	-	• Current (R / S / T / N)	• 3 Phase Voltage/Current RMS/Vector • Power(P, Q, S), PF(3-Phase) • Energy(Positive/Negative) • Frequency, Demand	• 3 Phase Voltage/Current RMS/Vector • Power(P, Q, S), PF(3-Phase) • Energy(Positive/Negative) • Frequency, Demand • Voltage/Current harmonics (1st~63th) • 3 Phase Waveforms • THD, TDD, K-Factor
Fine adjustment	-	-	• Fine adjustment for long/short time delay/instantaneous/ ground	• P type
Pre Trip Alarm	-	-	• Overload protection relays : DO (Alarm) (Ground fault is not available when using Pre trip alarm)	• P type
Digital Output	-	• 3DO (Fixed) • L, S/I, G Alarm	• 3DO (Programmable) • Trip, Alarm, General	• P type
IDMTL setting	-	-	• Compliance with IEC60255-3 SIT, VIT, EIT, DT	• P type
Communication	-	• Modbus/RS-485 • Profibus-DP	• Modbus / RS-485 • Profibus-DP	• Modbus / RS-485 • Profibus-DP
Power supply	• Self Power -Power source works over 25% of current of In (one pole)	• Self Power - Power source works over 25% of current of In (one pole) - External power source are required for comm. • AC/DC 100~250V • DC 24~60V	• AC/DC 100~250V • DC 24~60V	• AC/DC 100~250V • DC 24~60V
RTC timer	• Available	• Available	• Available	• Available
LED for trip info.	• Long time delay • Short time delay/Instantaneous • Ground fault	• N type	• N type	• N type
Fault recording	-	• 10 records (Fault/Current/Date and Time)	• 256 records (Fault/Current/Date and Time)	• 256 records • Last fault wave recording (3 Phase)
Event recording	-	-	• 256 records(Content, Status, Date)	• P type
Operating button	• Reset button	• Reset, Menu Up/Down, Left/Right, Enter	• A type	• A type

Basic protection function(L / S / I / G) is still under normal operation without control power.

# Molded case circuit breakers

## Metasol 30AF to 250AF Series

Frame Size(AF)		30	50			60	
Type		S-Type	N-Type	S-Type	H-Type	N-Type	S-Type
Type and Pole	2 pole	ABS32c	ABN52c	ABS52c	ABH52c	ABN62c	ABS62c
	3 pole	ABS33c	ABN53c	ABS53c	ABH53c	ABN63c	ABS63c
	4 pole	ABS34c	ABN54c	ABS54c	ABH54c	ABN64c	ABS64c
Rated current, I <sub>n</sub>	A	(3, 5, 10) 15, 20, 30	15, 20, 30, 40, 50		15, 20, 30, 40, 50	15, 20, 30, 40, 50, 60	
Rated operational voltage, U <sub>e</sub>	AC(V)	690	690	690	690	690	690
	DC(V)	500	500	500	500	500	500
Rated insulation voltage, U <sub>i</sub>	V	750	750	750	750	750	750
Rated impulse withstand voltage, U <sub>imp</sub>	kV	8	8	8	8	8	8
Rated short-circuit breaking capacity(I <sub>cu</sub> ) kA (Sym), KSC8321, IEC 60947-2							
AC	690V	2.5	2.5	5	10	2.5	5
	480/500V	7.5	7.5	10	35	7.5	10
	415/460V	14 (10)	14	18	50	14	18
	380V	18 (14)	18	22	50	18	22
	220/250V	30 (25)	30	35	100	30	35
DC	500V(3P)	5	5	10	30	5	10
	250V(2P)	5	5	10	30	5	10
Service breaking capacity(%I <sub>cu</sub> ), I <sub>cs</sub>		100	100	100	100	100	100
Category of use		A	A	A	A	A	A
Endurance (Number of operations)	Mechanical						
	Electrical						
Type of trip unit							
Thermal-magnetic release		fixed	fixed	fixed	fixed	fixed	fixed
Hydraulic-magnetic release							
Magnetic release only without thermal trip							
Earth leakage protection	for 3 pole	▲	▲	▲	▲	▲	▲
Accessories							
Electrical auxiliaries	Auxiliary switch	●	●	●	●	●	●
	Alarm switch	●	●	●	●	●	●
	Shunt trip	●	●	●	●	●	●
	Undervoltage trip	●	●	●	●	●	●
External accessories	Direct rotary handle	●	●	●	●	●	●
	Extended rotary handle	●	●	●	●	●	●
	Terminal shield	●	●	●	●	●	●
	Insulation barrier	●	●	●	●	●	●
	Rear connection	●	●	●	●	●	●
	Pad handle lock	●	●	●	●	●	●
Plug-in device	●	●	●	●	●	●	
Dimensions (mm)	W×H×D (3P)	75×130×60	75×130×60		90×155×60	75×130×60	
Weight(kg)	2 pole	0.5	0.5	0.5	0.7	0.5	0.5
	3 pole	0.7	0.7	0.7	1	0.7	0.7
	4 pole	0.9	0.9	0.9	1.2	0.9	0.9

Note) 1. ● applicable or available  
2. ▲ available as a separate breaker



100	125		250		
N-Type	S-Type	H-Type	N-Type	S-Type	H-Type
ABN102c	ABS102c	ABH102c	ABN202c	ABS202c	ABH202c
ABN103c	ABS103c	ABH103c	ABN203c	ABS203c	ABH203c
ABN104c	ABS104c	ABH104c	ABN204c	ABS204c	ABH204c
15, 20, 30, 40, 50, 60, 75, 100	15, 20, 30, 40, 50, 60, 75, 100, 125		100, 125, 150, 175, 200, 225, 250		
690	690	690	690	690	690
500	500	500	500	500	500
750	750	750	750	750	750
8	8	8	8	8	8
5	8	10	8	8	10
10	25	30	18	26	30
18	37	50	26	37	50
22	42	50	30	42	50
35	85	100	65	85	100
10	20	30	10	20	30
10	20	30	10	20	30
100	100	100	100	100	100
A	A	A	A	A	A
fixed	fixed	fixed	fixed	fixed	fixed
▲	▲	▲	▲	▲	▲
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
75 × 130 × 60	90 × 155 × 60		105 × 165 × 60		
0.5	0.7	0.7	1.1	1.1	1.1
0.7	1	1	1.2	1.2	1.2
0.9	1.2	1.2	1.6	1.6	1.6

Calibrated for 40°C	Amb. Temp.	-5°C	0°C	10°C	20°C	25°C	30°C	35°C	40°C	45°C	50°C
	In=15 to 30	111.9%	111.3%	110.0%	108.0%	106.6%	104.9%	102.7%	100.0%	96.8%	93.3%
In=40 to 100	110.2%	109.8%	108.7%	107.0%	105.8%	104.3%	102.4%	100.0%	97.2%	94.0%	
In=100 to 225	114.3%	113.2%	110.6%	107.5%	105.8%	104.0%	102.0%	100.0%	97.9%	95.6%	
In=250 to 800	110.0%	109.0%	107.0%	105.0%	104.0%	103.0%	101.5%	100.0%	98.5%	97.0%	

# Molded case circuit breakers

## Metasol 400AF to 1200AF Series

Frame Size(AF)		400			
Type		N-Type	S-Type	H-Type	L-Type
Type and Pole	2 pole	ABN402c	ABS402c	ABH402c	ABL402c
	3 pole	ABN403c	ABS403c	ABH403c	ABL403c
	4 pole	ABN404c	ABS404c	ABH404c	ABL404c
Rated current, I <sub>n</sub>	A	250, 300, 350, 400			
Rated operational voltage, U <sub>e</sub>	AC(V)	690	690	690	690
	DC(V)	500	500	500	500
Rated insulation voltage, U <sub>i</sub>	V	750	750	750	750
Rated impulse withstand voltage, U <sub>imp</sub>	kV	8	8	8	8
Rated short-circuit breaking capacity(I <sub>cu</sub> ) kA (Sym), KSC8321, IEC 60947-2					
AC	690V	5	8	10	14
	480/500V	18	35	50	65
	415/460V	37	50	65	85
	380V	42	65	70	100
	220/250V	50	75	85	125
DC	500V(3P)	10	20	40	40
	250V(2P)	10	20	40	40
Service breaking capacity(%I <sub>cu</sub> ), I <sub>cs</sub>		100	100	100	75
Category of use		A	A	A	A
Endurance (Number of operations)	Mechanical	-	-	-	-
	Electrical	-	-	-	-
Type of trip unit					
Thermal-magnetic release		fixed	fixed	fixed	fixed
Hydraulic-magnetic release		-	-	-	-
Magnetic release only without thermal trip		-	-	-	-
Earth leakage protection	for 3 pole	▲	▲	▲	▲
Accessories					
Electrical auxiliaries	Auxiliary switch	●	●	●	●
	Alarm switch	●	●	●	●
	Shunt trip	●	●	●	●
	Undervoltage trip	●	●	●	●
External accessories	Direct rotary handle	●	●	●	●
	Extended rotary handle	●	●	●	●
	Terminal shield	●	●	●	●
	Insulation barrier	●	●	●	●
	Rear connection	●	●	●	●
	Mechanical interlock	●	●	●	●
	Plug-in device	●	●	●	●
Dimensions (mm)	W×H×D (3P)	140×257×109			
Weight(kg)	2 pole	5.2	5.2	5.2	5.2
	3 pole	6.2	6.2	6.2	6.2
	4 pole	7.8	7.8	7.8	7.8

Note) 1. ● applicable or available  
2. ▲ available as a separate breaker





800			1000		1200		
N-Type	S-Type	L-Type	S-Type	L-Type	S-Type		L-Type
ABN802c	ABS802c	ABL802c	-	-	-	-	-
ABN803c	ABS803c	ABL803c	ABS1003b	ABL1003b	ABS1203b	ABS1203bE	ABL1203b
ABN804c	ABS804c	ABL804c	ABS1004b	ABL1004b	ABS1204b	-	ABL1204b
500, 630, 700, 800			1000		1200		
690	690	690	600	600	600	600	600
500	500	500	-	-	-	-	-
750	750	750	690	690	690	690	690
8	8	8	6	6	6	6	6
8	10	14	-	-	-	-	-
25	45	65	50	75	50	50	75
37	65	85	65	85	65	65	85
45	75	100	65	85	65	65	85
50	85	125	100	125	100	100	125
10	20	40	-	-	-	-	-
10	20	40	-	-	-	-	-
100	100	75	50	50	50	50	50
A	A	A	A	A	A	A	A
-	-	-	2500	2500	2500	2500	2500
-	-	-	500	500	500	500	500
fixed	fixed	fixed	fixed	fixed	fixed	-	fixed
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
▲	▲	▲	-	-	-	●	-
●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●
●	●	●	-	-	-	-	-
●	●	●	-	-	-	-	-
●	●	●	-	-	-	-	-
●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●
●	●	●	-	-	-	-	-
●	●	●	-	-	-	-	-
210×280×109			220×400×105		220×400×105		
11	11	11	-	-	-	-	-
11.5	11.5	11.5	19.6	19.6	-	-	-
18.2	18.2	18.2	-	-	25.7	25.7	25.7

Calibrated for 40°C	Amb. Temp.	-5°C	0°C	10°C	20°C	25°C	30°C	35°C	40°C	45°C	50°C
	In=15 to 30	111.9%	111.3%	110.0%	108.0%	106.6%	104.9%	102.7%	100.0%	96.8%	93.3%
	In=40 to 100	110.2%	109.8%	108.7%	107.0%	105.8%	104.3%	102.4%	100.0%	97.2%	94.0%
	In=100 to 225	114.3%	113.2%	110.6%	107.5%	105.8%	104.0%	102.0%	100.0%	97.9%	95.6%
In=250 to 800	110.0%	109.0%	107.0%	105.0%	104.0%	103.0%	101.5%	100.0%	98.5%	97.0%	

# Earth Leakage Circuit Breakers

## Metasol 30AF to 250AF Series

Frame Size(AF)		30	50			60	
Type		S-Type	N-Type	S-Type	H-Type	N-Type	S-Type
Type and Pole	2-pole	-	EBN52c	-	-	-	-
	3-pole	EBS33c	EBN53c	EBS53c	EBH53c	EBN63c	EBS63c
	4-pole	EBS34c	-	EBS54c	EBH54c	-	EBS64c
Protective function		Overload, Short-circuit and Ground fault	Overload, Short-circuit and Ground fault		Overload, Short-circuit and Ground fault	Overload, Short-circuit and Ground fault	
Rated current, I <sub>n</sub> A		15, 20, 30	15, 20, 30, 40, 50			15, 20, 30, 40, 50	60
Rated residual current, I <sub>Δn</sub> mA		30, 100/200/500	30, 100/200/500			30, 100/200/500	30, 100/200/500
Rated operational voltage, U <sub>e</sub> AC(V)		220/460	220/460			220/460	220/460
Rated impulse withstand voltage, U <sub>imp</sub> kV		6	6			6	6
Residual current off-time at I <sub>Δn</sub> sec		≤0.1 sec	≤0.1 sec			≤0.1 sec	≤0.1 sec
Rated short-circuit breaking capacity (I <sub>cu</sub> ) kA (Sym), KSC8321, IEC 60947-2							
AC	460V	14	14	18	50	14	18
	415V	14	14	18	50	14	18
	220/250V	30	30	35	100	30	35
Service breaking capacity(%I <sub>cu</sub> ), I <sub>cs</sub>		100	100	100	100	100	100
Category of use		A	A	A	A	A	A
Endurance (Number of operations)	Mechanical	25000	25000	25000	25000	25000	25000
	Electrical	10000	10000	10000	10000	10000	10000
Type of trip unit							
Overcurrent pick-up		Thermal-magnetic	Thermal-magnetic			Thermal-magnetic	
Earth leakage pick-up		Electronic	Electronic			Electronic	
Accessories							
Electrical auxiliaries	Auxiliary switch	●	●	●	●	●	●
	Alarm switch	●	●	●	●	●	●
	Shunt trip						
	Undervoltage trip						
External accessories	Insulation barrier	●	●	●	●	●	●
	Terminal cover (Long)	●	●	●	●	●	●
	Terminal cover (Short)	●	●	●	●	●	●
	Rotary handle (Direct)	●	●	●	●	●	●
	Rotary handle (Direct, Key lock)	●	●	●	●	●	●
	Rotary handle (Extended)	●	●	●	●	●	●
	Rear terminal (Bar)				●	●	●
	Rear terminal (Round)	●	●	●	●	●	●
	Plug-in kit	●	●	●	●	●	●
	Pad handle lock	●	●	●	●	●	●
Dimensions (mm)	W×H×D (3P)	75×130×60	75×130×60		90×155×60	75×130×60	
Weight(kg)	2 pole	-	0.5	-	-	-	-
	3 pole	0.7	0.7	0.7	1	0.7	0.7
	4 pole	0.9	-	0.9	1.2	-	0.9

Note) 1. ● applicable or available  
2. ▲ available as a separate breaker



100		125		250	
N-Type	S-Type	H-Type	N-Type	S-Type	H-Type
EBN102c	-	-	EBN202c	-	-
EBN103c	EBS103c	EBH103c	EBN203c	EBS203c	EBH203c
EBN104c	EBS104c	EBH104c	-	EBS204c	EBH204c
Overload, Short-circuit and Ground fault	Overload, Short-circuit and Ground fault		Overload, Short-circuit and Ground fault		
60, 75, 100	15, 20, 30, 40, 50, 60, 75, 100, 125		100, 125, 150, 175, 200, 225, 250		
30, 100/200/500 220/460	30,100/200/500 220/460		30,100/200/500 220/460		
6	6		6		
≤0.1 sec	≤0.1 sec		≤0.1 sec		
18	37	50	26	37	50
18	37	50	26	37	50
35	85	100	65	85	100
100	100	100	100	100	
A	A	A	A	A	
25000	25000	25000	20000	20000	20000
10000	10000	10000	5000	5000	5000
Thermal-magnetic	Thermal-magnetic		Thermal-magnetic		
Electronic	Electronic		Electronic		
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
75 × 130 × 60	90 × 155 × 60		105 × 165 × 60		
0.5	-	-	1.1	-	-
0.7	1	1	1.2	1.2	1.2
0.9	1.2	1.2	-	1.5	1.5

# Earth Leakage Circuit Breakers

## Metasol 400AF to 1200AF Series

Frame Size(AF)		400			
Type		N-Type	S-Type	H-Type	L-Type
Type and Pole	3-pole	EBN403c	EBS403c	EBH403c	EBL403c
	4-pole	EBN404c	EBS404c	EBH404c	EBL404c
Protective function		Overload, Short-circuit and Ground fault			
Rated current, I <sub>n</sub> A		250, 300, 350, 400			
Rated residual current, I <sub>Δn</sub> mA		30, 100/200/500mA			
Rated operational voltage, U <sub>e</sub> AC(V)		220/460	220/460	220/460	220/460
Rated impulse withstand voltage, U <sub>imp</sub> kV		6	6	6	6
Residual current off-time at I <sub>Δn</sub> sec		0.1 sec	0.1 sec	0.1 sec	0.1 sec
Rated short-circuit breaking capacity (I <sub>cu</sub> ) kA (Sym), KSC8321, IEC 60947-2					
AC	415/460V	37	50	65	85
	220/250V	50	75	85	125
Service breaking capacity(%I <sub>cu</sub> ), I <sub>cs</sub>		100	100	100	75
Category of use		A	A	A	A
Endurance (Number of operations)	Mechanical	40000	40000	40000	40000
	Electrical	10000	10000	10000	10000
Type of trip unit					
Overcurrent pick-up		Thermal-magnetic			
Earth leakage pick-up		Electronic			
Accessories					
Electrical auxiliaries	Auxiliary switch	●	●	●	●
	Alarm switch	●	●	●	●
	Shunt trip	●	●	●	●
	Undervoltage trip	●	●	●	●
External accessories	Insulation barrier	●	●	●	●
	Terminal cover (Long) - 2, 3pole	●	●	●	●
	Terminal cover (Long) - 4pole	●	●	●	●
	Rotary handle (Direct)	●	●	●	●
	Rotary handle (Extended)	●	●	●	●
	Mechanical interlock - 2, 3pole	●	●	●	●
	Mechanical interlock - 4pole	●	●	●	●
	Rear terminal - 2pole	●	●	●	●
	Rear terminal - 3pole	●	●	●	●
	Rear terminal - 4pole	●	●	●	●
Plug-in kit	●	●	●	●	
Dimensions (mm)	W×H×D (3P)	140×257×109			
Weight(kg)	2 pole	-	-	-	-
	3 pole	7	7	7	7
	4 pole	8.4	8.4	7	7

Note) 1. ● applicable or available  
2. ▲ available as a separate breaker



# Air circuit breakers

## Susol ACB Series



Type		
Ampere frame	(AF)	
Rated current(A)	(In max)	at 40°C
Setting current (A) *	Control trip relay (... × In max)	
Rated current of neutral pole (A)		
Rated insulation voltage (V)	(Ui)	
Rated operating voltage (V)	(Ue)	
Rated impulse withstand voltage (kV)	(Uimp)	
Frequency (Hz)		
Number of poles (P)		
Rated breaking capacity (kA sym)	220V/230V/380V/415V	
IEC 60947-2	(Icu)	460V/480V/500V
AC 50/60Hz	550V/600V/690V	
Rated service breaking capacity (kA)	(Ics)	... % × Icu
Rated making capacity (kA peak)	220V/230V/380V/415V	
IEC 60947-2	(Icm)	460V/480V/500V
AC 50/60Hz	550V/600V/690V	
Rated short-time withstand current (kA) (Icw)	1sec	
	2 sec	
	3 sec	
Operating time (ms)	Maximum total breaking time	
	Maximum closing time	
Life cycle (time)	Mechanical	
	Electrical	
Connections **	Draw-out / Fixed	Horizontal connection
		Vertical connection
		Front connection
		Mixed connection
Weight (kg) (3P/4P)	Draw-out type	Main body (With cradle)
		Cradle only
	Fixed type	Motor charging type
		Manual charging type
External dimensions (mm) (H×W×D)	Draw-out type	3P
		4P
	Fixed type	3P
		4P
Trip relay		
Certificate & Approval		
Marine classification		

Susol						
AH-06D	AH-08D	AH-10D	AH-13D	AH-16D	AH-20D	
630	800	1000	1250	1600	2000	
200	400					
400	630	1000	1250	1600	2000	
630	800					
(0.4 ~ 1.0) × In max						
400	400					
630	630	1000	1250	1600	2000	
	800					
1000						
690						
12						
50/60						
3, 4						
85						
85						
65						
100%						
187						
187						
143						
65						
60						
50						
40						
80						
20,000						
5,000						
					●	-
					○	●
					○	-
					○	-
					63/74	70/85
					61/72	68/83
					29/32	33/40
					34/44	38/47
					32/42	36/45
					430 × 334 × 375	
					430 × 419 × 375	
					300 × 300 × 295	
					300 × 385 × 295	
					N, A, P, S type	
					KS / KEMA / KERI / GOST / CCC	
					LR, ABS, DNV, KR, BV, GL, RINA, NK	

\* Refer to trip relay specification. \*\* ●: Standard, ○: Option

※ Life time means not guarantee, but limitation.

Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee



<b>Susol</b>									
AH-06E	AH-08E	AH-10E	AH-13E	AH-16E	AH-20E	AH-25E	AH-32E	AH-40E	
630	800	1000	1250	1600	2000	2500	3200	4000	
630	800	1000	1250	1600	2000	2500	3200	4000	
(0.4 ~ 1.0) × In max									
630	800	1000	1250	1600	2000	2500	3200	4000	
1,000									
690									
12									
50/60									
3, 4									
100									
100									
85									
100%									
220									
220									
187									
85									
75									
65									
40									
80									
15,000									
5,000									
●									○
○									●
○									-
○									-
			87/103				104/147		
			85/101				102/145		
			44/55				58/70		
			44/55				63/100		
			42/53				61/98		
430 × 412 × 375									
430 × 527 × 375									
300 × 378 × 295									
300 × 493 × 295									
N, A, P, S type									
KS / KEMA / KERI / GOST / CCC									
LR, ABS, DNV, KR, BV, GL, RINA, NK									

<b>Susol</b>		
AH-40G	AH-50G	AH-63G
4000	5000	6300
4000	5000	6300
(0.4 ~ 1.0) × In max		
4000	5000	6300
1,000		
690		
12		
50/60		
3, 4		
150		
150		
100		
100%		
330		
330		
220		
100		
85		
75		
40		
80		
10,000		
2,000		
		○
		●
		-
		-
181/223		186/230
179/221		184/228
97/117		102/124
98/123		103/130
96/121		101/128
460 × 785 × 375		
460 × 1015 × 375		
300 × 751 × 295		
300 × 981 × 295		
N, A, P, S type		
KS / KEMA / KERI / GOST / CCC		
LR, ABS, DNV, KR, BV, GL, RINA, NK		



# Air circuit breakers

## Metasol ACB Series



Type			
Ampere frame	(AF)		
Rated current(A)	(In max)	at 40°C	
Setting current (A) *	Control trip relay (... × In max)		
Rated current of neutral pole (A)			
Rated insulation voltage (V)	(Ui)		
Rated operating voltage (V)	(Ue)		
Rated impulse withstand voltage (kV)	(Uimp)		
Frequency (Hz)			
Number of poles (P)			
Rated breaking capacity (kA sym)	220V/230V/380V/415V		
IEC 60947-2	(Icu)	460V/480V/500V	
AC 50/60Hz	550V/600V/690V		
Rated service breaking capacity (kA)	(Ics)	... % × Icu	
Rated making capacity (kA peak)	220V/230V/380V/415V		
IEC 60947-2	(Icm)	460V/480V/500V	
AC 50/60Hz	550V/600V/690V		
Rated short-time withstand current (kA)	(Icw)	1 sec 2 sec 3 sec	
Operating time (ms)	Maximum total breaking time Maximum closing time		
Life cycle (time)	Mechanical		
	Electrical		
Connections **	Draw-out / Fixed	Horizontal connection	●
		Vertical connection	○
		Front connection	○
		Mixed connection	○
Weight (kg) (3P/4P)	Draw-out type	Main body (With cradle)	Motor charging type 63/74
		Cradle only	Manual charging type 61/72
	Fixed type	Motor charging type	29/32
		Manual charging type	34/44
External dimensions (mm) (H×W×D)	Draw-out type	3P	430×334×375
		4P	430×419×375
	Fixed type	3P	300×300×295
		4P	300×385×295
Trip relay	N, A, P type		
Certificate & Approval	KS / KEMA / KERI / GOST		
Marine classification	LR, ABS, DNV, KR, BV, GL, RINA, NK		

Metasol					
AN-06D	AN-08D	AN-10D	AN-13D	AN-16D	AS-20D
630	800	1000	1250	1600	2000
200	400				
400	630	1000	1250	1600	2000
630	800				
(0.4 ~ 1.0) × In max					
400	400				
630	630	1000	1250	1600	2000
	800				
1000					
690					
12					
50/60					
3, 4					
					70
					70
					65
					100%
					100%
					143
					154
					143
					154
					105
					143
					50
					65
					42
					55
					36
					50
40					
80					
20,000					
5,000					
					-
					●
					-
					-
					-
					70/85
					68/83
					33/40
					38/47
					36/45
430×334×375					
430×419×375					
300×300×295					
300×385×295					
N, A, P type					
KS / KEMA / KERI / GOST					
LR, ABS, DNV, KR, BV, GL, RINA, NK					

\* Refer to trip relay specification. \*\* ●: Standard, ○: Option

※ Life time means not guarantee, but limitation.

Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee



<b>Metasol</b>			
AS-20E	AS-25E	AS-32E	AS-40E
2000	2500	3200	4000
630, 800			
1000, 1250	2500	3200	4000
1600, 2000			
(0.4 ~ 1.0) × In max			
630, 800			
1000, 1250	2500	3200	4000
1600, 2000			
1,000			
690			
12			
50/60			
3, 4			
85			
85			
85			
100%			
187			
187			
187			
85			
75			
65			
40			
80			
15,000			
5,000			
●			○
○			●
○			-
○			-
87/103			104/147
85/101			102/145
44/50			58/70
44/55			63/100
42/53			61/98
430×412×375			
430×527×375			
300×378×295			
300×493×295			
N, A, P type			
KS / KEMA / KERI / GOST			
LR, ABS, DNV, KR, BV, GL, RINA, NK			

<b>Metasol</b>	
AS-50F	
4000	5000
4000	5000
(0.4 ~ 1.0) × In max	
4000	5000
1000	
690	
12	
50/60	
3, 4	
100	
100	
85	
100%	
220	
220	
187	
85	
75	
65	
40	
80	
10,000	
2,000	
○	○
●	●
-	-
-	-
145/173	145/173
143/171	143/171
78/90	78/90
76/94	76/94
74/92	74/92
460×629×375	
460×799×375	
300×597×295	
300×767×295	
N, A, P type	
KS / KEMA / KERI / GOST	
LR, ABS, DNV, KR, BV, GL, RINA, NK	

<b>Metasol</b>		
AS-40G	AS-50G	AS-63G
4000	5000	6300
4000	5000	6300
(0.4 ~ 1.0) × In max		
4000	5000	6300
1,000		
690		
12		
50/60		
3, 4		
120		
120		
100		
100%		
264		
264		
220		
100		
85		
75		
40		
80		
10,000		
2,000		
○	○	○
●	●	●
-	-	-
-	-	-
181/223		186/230
179/221		184/228
97/117		102/124
98/123		103/130
96/121		101/128
460×785×375		
460×1015×375		
300×751×295		
300×981×295		
N, A, P type		
KS / KEMA / KERI / GOST		
LR, ABS, DNV, KR, BV, GL, RINA, NK		

# Trip relay(OCR)





The trip relay of Susol ACB provides the additional protection functions for voltage, frequency, unbalance, and others in addition to main protection functions for over current, short-circuit, ground fault. It supports the advanced measurement functions for voltage, current, power, electric energy, harmonics, communication function, and others.

Analog trip function interlocked with mechanism enhanced a durability of devices as well as the breaking capacity of ACB.

Zone selective interlocking function makes the protective coordination more simple and thermal memory can be applied to various loads.



# Trip relay types

Classification	N type	A type	P type	S type
Externals				
Current protection	• L / S / I / G / Thermal	• L / S / I / G / Thermal • ZSI(Protective coordination)	• L / S / I / G / Thermal(Continuous) • ZSI(Protective coordination)	• P type
Other protection	-	• Earth leakage (Option)	• Earth leakage(Option) • Over/Under current • Over/Under frequency • Unbalance(Voltage/Current) • Reverse power	• P type
Measurement function	-	• Current (R / S / T / N)	• 3 Phase Voltage/Current RMS/Vector • Power(P, Q, S), PF(3-Phase) • Energy(Positive/Negative) • Frequency, Demand	• 3 Phase Voltage/Current RMS/Vector • Power(P, Q, S), PF(3-Phase) • Energy(Positive/Negative) • Frequency, Demand • Voltage/Current harmonics (1st~63th) • 3 Phase Waveforms • THD, TDD, K-Factor
Fine adjustment	-	-	• Fine adjustment for long/short time delay/instantaneous/ ground	• P type
Pre Trip Alarm	-	-	• Overload protection relays : DO (Alarm) (Ground fault is not available when using Pre trip alarm)	• P type
Digital Output	-	• 3DO (Fixed) • L, S/I, G Alarm	• 3DO (Programmable) • Trip, Alarm, General	• P type
IDMTL setting	-	-	• Compliance with IEC60255-3 SIT, VIT, EIT, DT	• P type
Communication	-	• Modbus/RS-485 • Profibus-DP	• Modbus / RS-485 • Profibus-DP	• Modbus / RS-485 • Profibus-DP
Power supply	• Self Power -Power source works over 20% of load current.	• Self Power - Power source works over 20% of load current. - External power source are required for comm. • AC/DC 100~250V • DC 24~60V	• AC/DC 100~250V • DC 24~60V	• AC/DC 100~250V • DC 24~60V
RTC timer	• Available	• Available	• Available	• Available
LED for trip info.	• Long time delay • Short time delay/Instantaneous • Ground fault	• N type	• N type	• N type
Fault recording	-	• 10records (Fault/Current/Date and Time)	• 256records (Fault/Current/Date and Time)	• 256records • Last fault wave recording (3 Phase)
Event recording	-	-	• 256 records(Content, Status, Date)	• P type
Operating button	• Reset button	• Reset, Menu Up/Down, Left/Right, Enter	• A type	• A type

Basic protection function(L / S / I / G) is still under normal operation without control power.

# LS Final Distribution Boards

LS Final Distribution Boards is fully type-tested by ASTA and specially designed for residential and commercial area for the protection of people and equipment.



شركة أبوظبي للتوزيع  
Abu Dhabi Distribution Co.



## Full range of Residential & Commercial Distribution System



### Features:


- Designed to provide higher level of safety for final distribution board
- Pan assembly type busbar systems to provide easier cabling
- Split neutral bars provide easy connection and maximum cable space
- Easy and safe mounting of LS Miniature Circuit Breaker
- Flush and surface mounted
- Tin plate and cooper busbar
- Galvanized 1.2mm steel sheet



### Technical Description

- In compliance with standards : IEC 60439-3
- Short-circuit withstand: 17kA/0.2s
- Peak short time withstand: 35kA
- Index of degree: IP 4X
- Rated operational Voltage(Ue): 415V
- Rated insulation Voltage(Ui): 460V
- Rated Frequency: 50/60Hz
- Rated impuls withstand Voltage(Uimp): 4kV
- Rated Current (In): Upto 125A

## Internal view

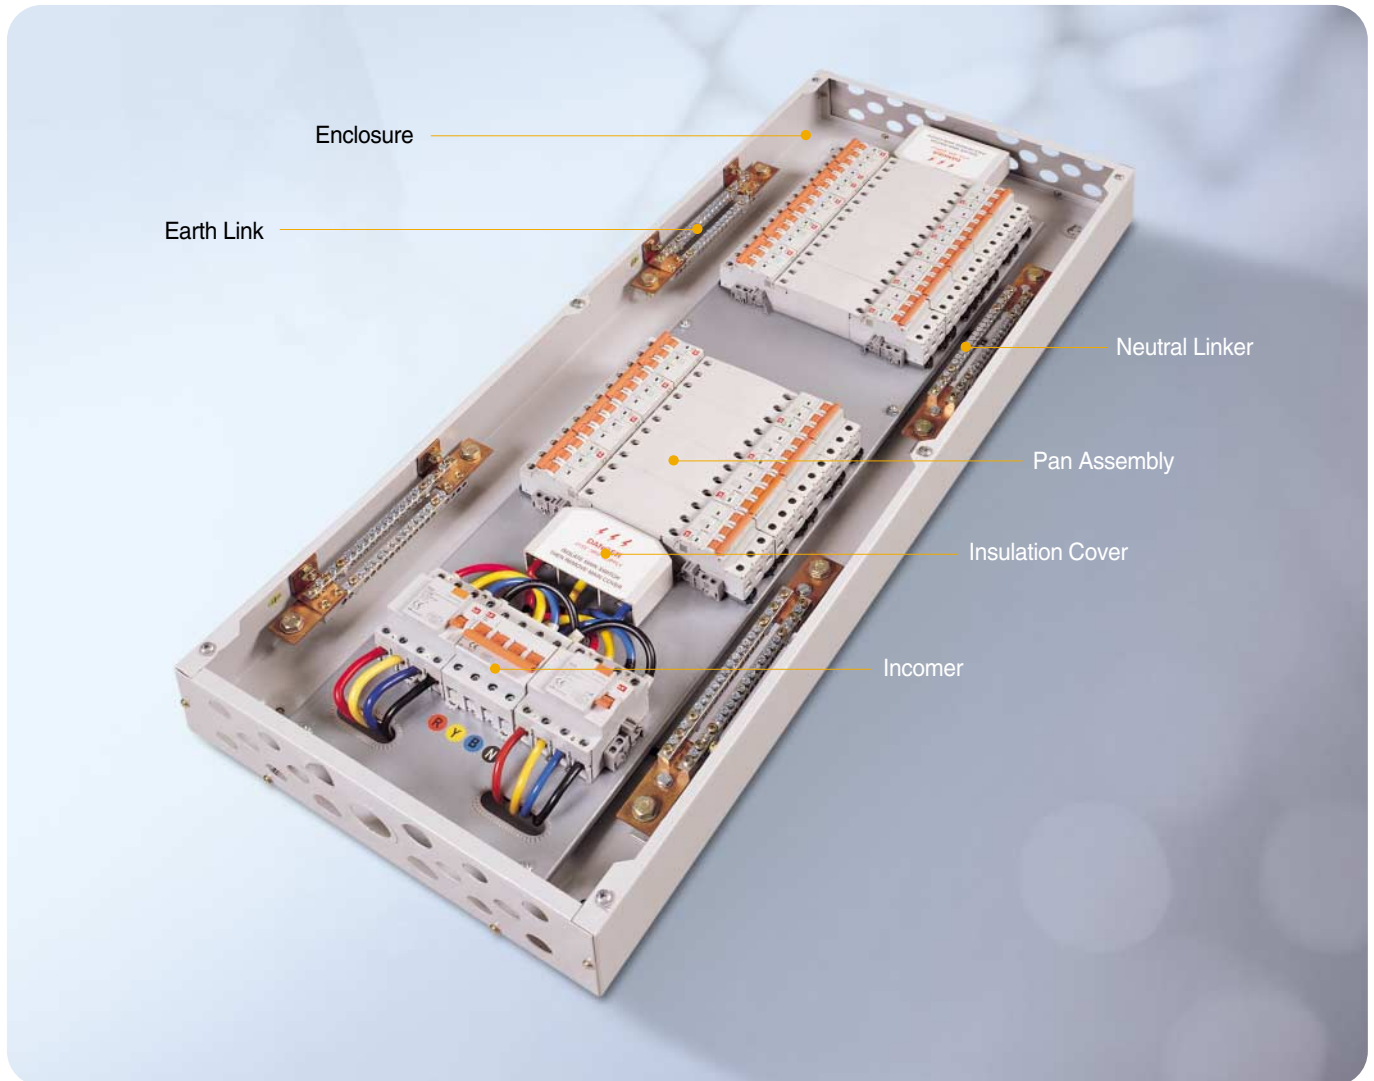

## Pan Assembly System




- Rigid and removable pan assembly to provide easier cabling
- Modular panel system
- Flexible connect with CB, RCCB and Disconnect switch



# LS Final Distribution Boards

## Specific of FDB Split busbar type

with incoming Isolator feeding two ELCBs

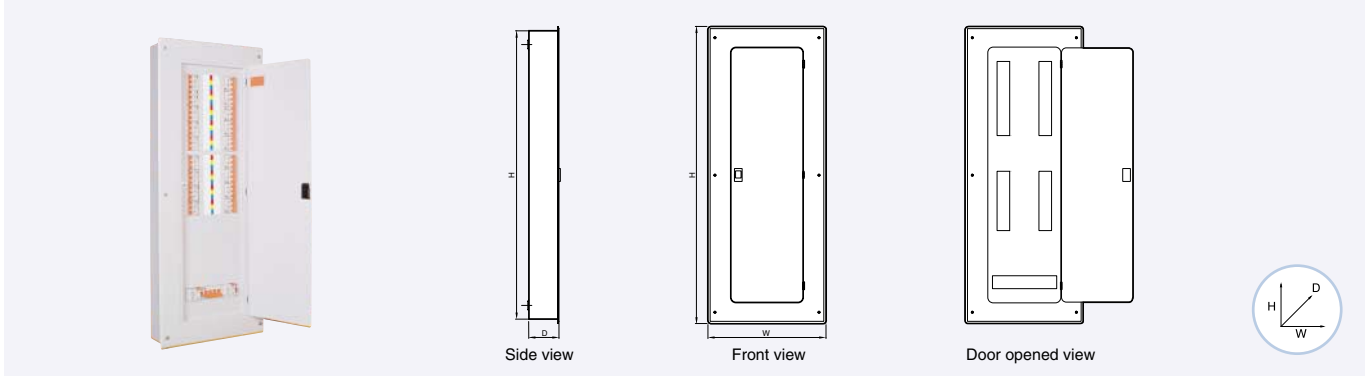


### Selection of Enclosure

Code Description	Type	Dimension	
02+02 Way Split DB	Flush	530H×430W×110D mm	
04+02 Way Split DB		580H×430W×110D mm	
04+04 Way Split DB		680H×430W×110D mm	
06+04 Way Split DB		780H×430W×110D mm	
06+06 Way Split DB		780H×430W×110D mm	
08+06 Way Split DB		830H×430W×110D mm	
08+08 Way Split DB		980H×430W×110D mm	
10+08 Way Split DB		980H×430W×110D mm	
12+06 Way Split DB		980H×430W×110D mm	
02+02 Way Split DB		Surface	510H×410W×110D mm
04+02 Way Split DB			560H×410W×110D mm
04+04 Way Split DB			660H×410W×110D mm
06+04 Way Split DB	760H×410W×110D mm		
06+06 Way Split DB	760H×410W×110D mm		
08+06 Way Split DB	810H×410W×110D mm		
08+08 Way Split DB	960H×410W×110D mm		
10+08 Way Split DB	960H×410W×110D mm		
12+06 Way Split DB	960H×410W×110D mm		

## Single busbar & Single Incomer type

With Incoming 4P ELCB/MCB/Isolator

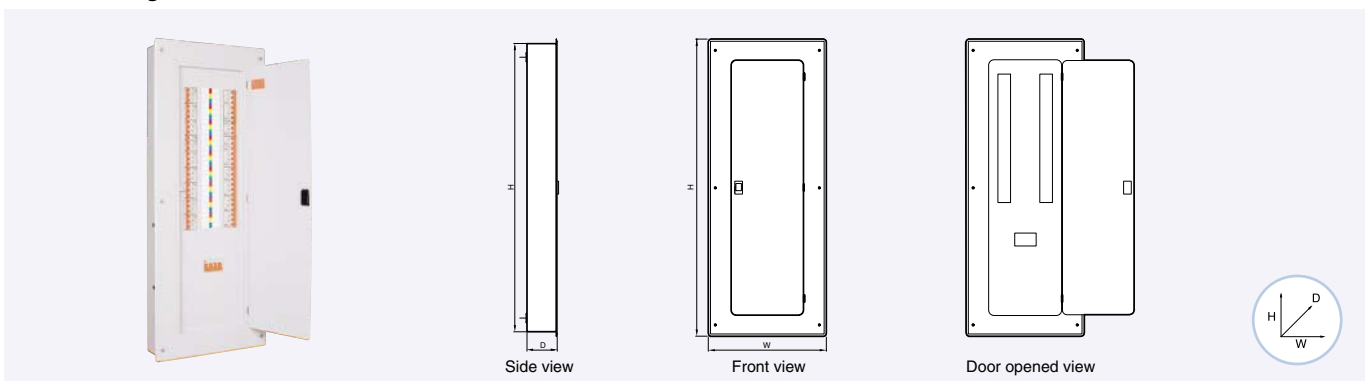

### Selection of Enclosure


Code Description	Type	Dimension
4 Way DB 1 INC	Flush	530H×430W×110D mm
6 Way DB 1 INC		580H×430W×110D mm
8 Way DB 1 INC		680H×430W×110D mm
12 Way DB 1 INC		780H×430W×110D mm
14 Way DB 1 INC		830H×430W×110D mm
18 Way DB 1 INC		980H×430W×110D mm
20 Way DB 1 INC		Not Common
24 Way DB 1 INC		Not Common
4 Way DB 1 INC	Surface	510H×410W×110 D mm
6 Way DB 1 INC		560H×410W×110 D mm
8 Way DB 1 INC		660H×410W×110 D mm
12 Way DB 1 INC		760H×410W×110 D mm
14 Way DB 1 INC		810H×410W×110 D mm
18 Way DB 1 INC		960H×410W×110 D mm
20 Way DB 1 INC		Not Common
24 Way DB 1 INC		Not Common



# Specific of FDB

## Single busbar & Dual Incomer type

### With Incoming Isolator & ELCB

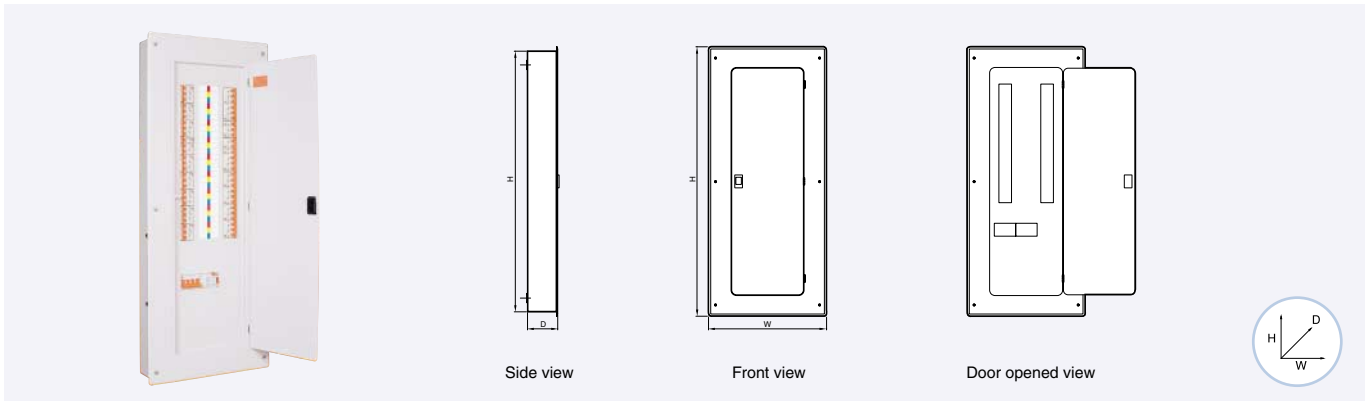


### Selection of Enclosure

Code Description	Type	Dimension
4 Way DB 2 INC	Flush	530H×430W×110D mm
6 Way DB 2 INC		580H×430W×110D mm
8 Way DB 2 INC		680H×430W×110D mm
12 Way DB 2 INC		780H×430W×110D mm
14 Way DB 2 INC		830H×430W×110D mm
18 Way DB 2 INC		980H×430W×110D mm
20 Way DB 2 INC		Not Common
24 Way DB 2 INC	Not Common	
4 Way DB 2 INC	Surface	510H×410W×110D mm
6 Way DB 2 INC		560H×410W×110D mm
8 Way DB 2 INC		660H×410W×110D mm
12 Way DB 2 INC		760H×410W×110D mm
14 Way DB 2 INC		810H×410W×110D mm
18 Way DB 2 INC		960H×410W×110D mm
20 Way DB 2 INC		Not Common
24 Way DB 2 INC		Not Common

## SP&N Consumer Unit

### Incoming 2P ELCB / MCB / Isolator

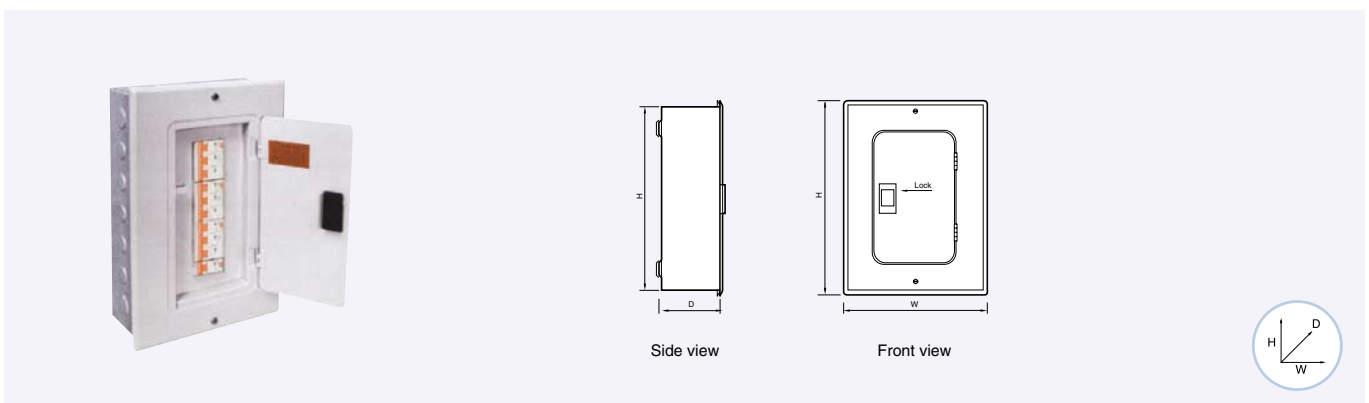

### Selection of Enclosure

Code Description	Type	Dimension
6 Way 1P C.Unit		320H×240W×100D mm
9 Way 1P C.Unit		370H×240W×100D mm
12 Way 1P C.Unit		420H×250W×100D mm
15 Way 1P C.Unit		490H×250W×100D mm
18 Way 1P C.Unit		550H×250W×100D mm
22 Way 1P C.Unit		Not Common

- LS SMDB Solutions are arranged for 3 Phase and neutral incoming supply and specially designed easy to install MCCBs.
- These are fitted with Form 3b and 2 busbar assemblies, tested and ASTA Certified.



شركة أبوظبي للتوزيع  
Abu Dhabi Distribution Co.



## Rating

- A wide choice of incoming MCCBs make LS SMDB panels flexible to suit most of the requirements and represent excellent value and will appeal to consultants, contractors, end users and OEMs. These are offered in ratings of 125A, 250A, 400A, 630A.
- All incoming and outgoing MCCBs have Thermal/Magnetic fixed and adjustable tripping mechanisms incorporated with a trip-to-test button. These are available in ratings as follows : 16, 20, 25, 32, 40, 50, 63, 80, 100, 125, 160, 250, 400, 630A.

## Technical Specifications

### Constructional Characteristics


- Complied with IEC 60947-1
- Fully Type Tested, ASTA Certified
- Degree of protection : IP41 as per IEC 60529
- Form of separation: Form 3b
- Enclosure constructed from rigid folded zinc phosphate and protected both internally and externally with polyester powder coating

### Electrical Characteristics

- Rated Operational Voltage  $U_e$ : upto 690V
- Rated Insulation voltage  $U_i$ : upto 750V
- Rated Frequency: 50/60Hz
- Rated Impulse withstand voltage  $U_{imp}$ : 8kV
- Rated Short time  $I_{cw}$  & peak withstand  $I_{pk}$  Current: 36kA/1S

# Incoming Devices

## MCCB Panelboards

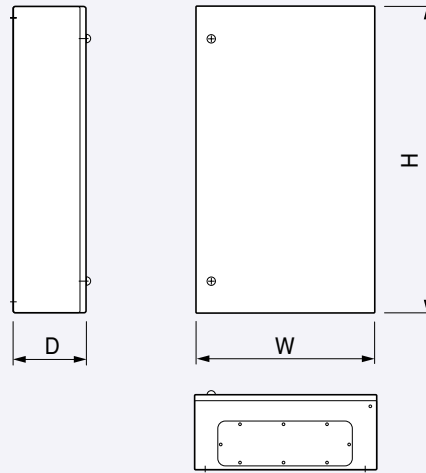

### Metasol Series

Incoming Breaker 250 Amps Outgoing Breaker 100 Amps				Incoming Breaker 400 Amps Outgoing Breaker 100 Amps				Incoming Breaker 630 Amps Outgoing Breaker 100 Amps			
No of Ways	Width	Height	Depth	No of Ways	Width	Height	Depth	No of Ways	Width	Height	Depth
2	700	800	180	4	700	1000	250				
4	700	800	180	6	700	1000	250	6	800	1000	250
6	700	800	180	8	700	1200	250	8	800	1200	250
8	700	1000	180	10	700	1400	250	10	800	1400	250
10	700	1200	180	12	700	1400	250	12	800	1400	250
12	700	1200	180	14	700	1600	250	14	800	1600	250

### Susol TD/TS Series

Incoming Breaker 250 Amps Outgoing Breaker 100 Amps				Incoming Breaker 400 Amps Outgoing Breaker 100 Amps				Incoming Breaker 630 Amps Outgoing Breaker 100 Amps			
No of Ways	Width	Height	Depth	No of Ways	Width	Height	Depth	No of Ways	Width	Height	Depth
2	700	800	180	4	700	1000	250				
4	700	800	180	6	700	1000	250	6	800	1000	250
6	700	800	180	8	700	1200	250	8	800	1200	250
8	700	1000	180	10	700	1400	250	10	800	1400	250
10	700	1200	180	12	700	1400	250	12	800	1400	250
12	700	1200	180	14	700	1600	250	14	800	1600	250


# LS SMDB Solution

## Incoming Devices

### LSIS “Susol series” range of MCCBs

Rated current, In	250A ..... 630A								
Rated operational voltage, Ue	750V								
MCCB breaker type	TS250			TS400			TS630		
Ultimate breaking capacity, Icu (kA rms) at 415V	N	H	L	N	H	L	N	H	L
	50	85	150	50	85	150	50	85	150
Service breaking capacity, Ics.....% Icu	100% Icu			100% Icu			100% Icu		
Protection trip unit	Thermal magnetic / Electronic								
Switch disconnecter type TS	TS250NA			TS400NA			TS630NA		
Short-circuit making capacity Icm (kApeak) (with upstream circuit breaker)	4.9			7.1			8.5		


#### Incoming application

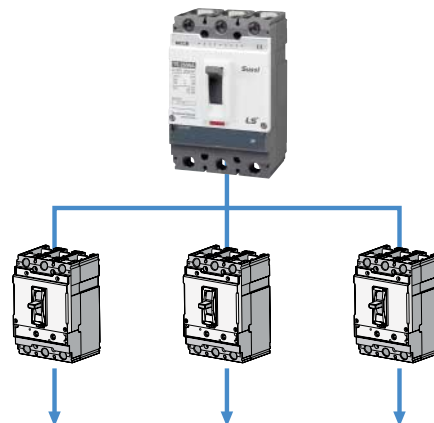

### LSIS “Metasol series” range of MCCBs

Rated current, In	250A ..... 630A		
Rated operational voltage, Ue	690V		
Breaker type	ABS203c	ABS403c	ABS803c
Ultimate breaking capacity, Icu (kA rms) at 415V	37	50	65
Service breaking capacity, Ics.....% Icu	100% Icu	100% Icu	100% Icu
Protection trip unit	Thermal magnetic		

#### Incoming application

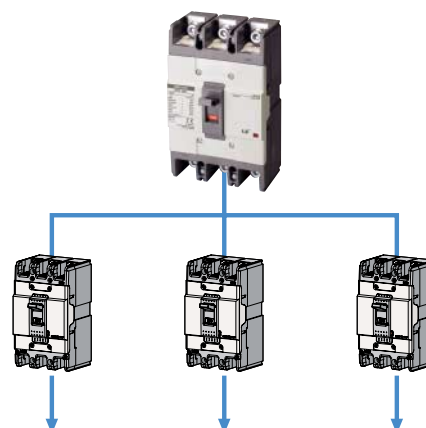


## Outgoing devices

### LSIS “Susol series” range of MCCBs

Rated current, In	16A ..... 250A					
Rated operational voltage, Ue	upto 750V					
Breaker type	TD100, TD160, TS100, TS160, TS250					
	N		H		L	
No. of poles	1P	3P	1P	3P	1P	3P
Ultimate breaking capacity, Icu (kA rms) at 240V	30	100	50	120	-	200
Service breaking capacity, Ics.....% Icu	100% Icu					
Protection trip unit	Thermal magnetic / Electronic					


#### Incoming application

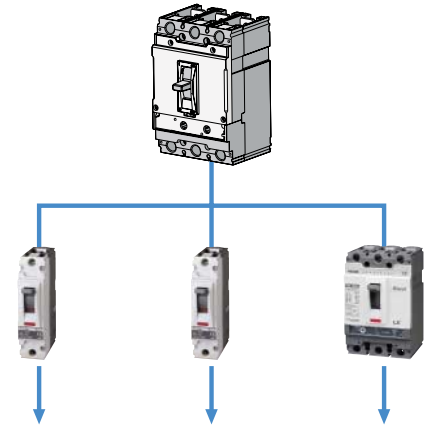

### LSIS “Metasol series” range of MCCBs

Rated current, In	15A ..... 100A					
Rated operational voltage, Ue	upto 415V - Single pole upto 690V - Three pole					
Breaker type	ABS103c					
	N		H		L	
No. of poles	2P	3P	2P	3P	2P	3P
Ultimate breaking capacity, Icu (kA rms) at 240V	35		85		100	
Ultimate breaking capacity, Icu (kA rms) at 415V	18		37		50	
Service breaking capacity, Ics.....% Icu	100% Icu					
Protection trip unit	Thermal magnetic					

#### Incoming application

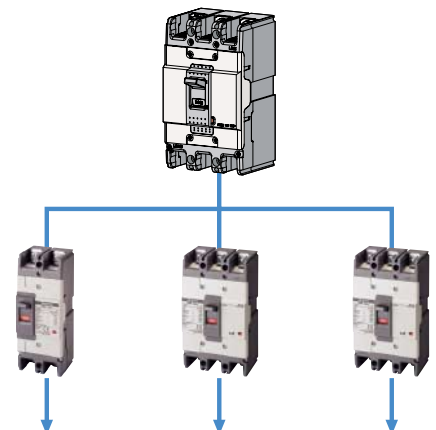

# Vacuum Circuit Breakers

## Susol VCB Series

### VL 06

Type		VL-06□08□04	VL-06□13□06
Rated voltage	Ur (kV)	7.2	
Rated normal current	Ir (A)	400	630
Rated frequency	fr (Hz)	50/60	
Rated short-circuit current	Isc (kA)	8	12.5
Rated short-time withstand current (3 sec)	Ik (kA)	8	12.5
Rated short-circuit breaking capacity	(MVA)	100	160
Rated short-circuit making current	Ip (kA)	20.8	32.5
Rated breaking time	(cycle)	3	
Rated withstand voltage	Power frequency (1 min)	20	
	Impulse (1.2×50μs)	60	
Rated operating sequence		O-0.3s-CO-15s-CO	
Control voltage	Closing coil (V)	AC/DC 100~130V, AC/DC 200~250V, DC 125V, DC 24~30V, DC 48~60V, AC 48V	
	Trip coil (V)	AC/DC 100~130V, AC/DC 200~250V, DC 125V, DC 24~30V, DC 48~60V, AC 48V	
Auxiliary contact		2a2b, 4a4b, 6a6b	
Rated opening time	(sec)	≤ 0.04	
No-load closing time	(sec)	≤ 0.06	
Type test	Mechanical	M2	
	Electrical	E2 (List1)	
	Capacitive current switching	C2	
Lifetime *	Mechanical (time)	30000	
	Electrical (time)	30000	
Installation	Fixed	P type	
	Draw-out	E, F, G type (for MESG)	
Pole centre distance	(mm)	130	
Weight	CB (E, F, G type) (kg)	37	37
	Cradle (E, F, G type) (kg)	18, 25, 32	19, 26, 33
Applied standards		IEC 62271-100, KS C 4611, JEC 2300/JIS C 4603	

\* With maintenance

### VL 06...17

Type		VL-06□20/25□06/13/20			VL-12□20/25□06/13/20			VL-17□20/25□06/13/20		
Rated voltage	Ur (kV)	7.2			12			17.5		
Rated normal current	Ir (A)	630	1250	2000	630	1250	2000	630	1250	2000
Rated frequency	fr (Hz)	50/60								
Rated short-circuit current	Isc (kA)	20/25								
Rated short-time withstand current (3 sec)	Ik (kA)	20/25								
Rated short-circuit breaking capacity	(MVA)	250/310			410/520			600/750		
Rated short-circuit making current	Ip (kA)	62.5/65								
Rated breaking time	(cycle)	3								
Rated withstand voltage	Power frequency (1 min)	20			28 (42)			38		
	Impulse (1.2×50μs)	60			75			95		
Rated operating sequence		O-0.3s-CO-15s-CO								
Control voltage	Closing coil (V)	DC 24~30V, DC 48~60V, DC 110V, DC 125V, DC 220V, AC 48V, AC 100~130V, AC 220~250V								
	Trip coil (V)	DC 24~30V, DC 48~60V, DC 110V, DC 125V, DC 220V, AC 48V, AC 100~130V, AC 220~250V								
Auxiliary contact		4a4b, 10a10b								
Rated opening time	(sec)	≤ 0.04								
No-load closing time	(sec)	≤ 0.06								
Type test	Mechanical	M2								
	Electrical	E2 (List3)								
	Capacitive current switching	C2								
Lifetime *	Mechanical (time)	30000								
	Electrical (time)	30000								
Installation	Fixed	P type			P type					
	Draw-out	E, F, G type (for MESG), H type (for MCSG)			E, F type (for MESG), H type (for MCSG)					
Pole centre distance	(mm)	150			150 (210)			150 (210)		
Weight	CB (H type) (kg)	100	100	130	115 (120)	115 (120)	130 (140)	115 (120)	115 (120)	130 (140)
	Cradle (H type) (kg)	170	170	180	170 (200)	170 (200)	180 (200)	170 (200)	170 (200)	180 (200)
Applied standards		IEC 62271-100								

\* With maintenance

## VH 06...36

Type			VH-06□50□12/20/25/32/40					VH-12□50□12/20/25/32/40					VH-17□50□12/20/25/32			
Rated voltage	Ur (kV)		7.2					12					17.5			
Rated normal current	Ir (A)		1250	2000	2500	3150	4000	1250	2000	2500	3150	4000	1250	2000	2500	3150
Rated frequency	fr (Hz)		50/60													
Rated short-circuit current	Isc (kA)		50													
Rated short-time withstand current (3 sec)	Ik (kA)		50													
Rated short-circuit breaking capacity	(MVA)		623					1039					1515			
Rated short-circuit making current	Ip (kA)		130													
Rated breaking time	(cycle)		3													
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	20					28					38			
	Impulse (1.2×50μs)	Up (kV)	60					75					95			
Rated operating sequence			O-0.3s-CO-3min-CO													
Control voltage	Closing coil	(V)	DC 48V, DC 110V, DC 125V, DC 220V, AC 48V, AC 110V, AC 220V													
	Trip coil	(V)	DC 48V, DC 110V, DC 125V, DC 220V, AC 48V, AC 110V, AC 220V													
Auxiliary contact			4a4b, 10a10b													
Rated opening time	(sec)		≤ 0.04													
No-load closing time	(sec)		≤ 0.06													
Type test	Mechanical		M2													
	Electrical		E2 (List3)													
	Capacitive current switching		C2													
Lifetime *	Mechanical	(time)	20000													
	Electrical	(time)	20000													
Installation	Fixed		P type			-	P type			-	P type					
	Draw-out		H type (for MCSG)			G type**	H type (for MCSG)			G type**	H type (for MCSG)					
Pole centre distance	(mm)		210	275	275	275	210	275	275	275	210	275	275			
Weight	CB (H type)	(kg)	230	287	290	385	230	287	290	385	230	287	290			
	Cradle (H type)	(kg)	175	320	320	315	175	320	320	315	175	320	320			
Applied standards			IEC 62271-100													

\* With maintenance

\*\* G type (for MCSG)

Type			VH-20□25□25			VH-20□32□12/20/32			VH-20□40□12/20/32		
Rated voltage	Ur (kV)		24/25.8								
Rated normal current	Ir (A)		2500			1250	2000	3150	1250	2000	3150
Rated frequency	fr (Hz)		60								
Rated short-circuit current	Isc (kA)		25			31.5			40		
Rated short-time withstand current (3 sec)	Ik (kA)		25			31.5			40		
Rated short-circuit breaking capacity	(MVA)		1039/1117			1309/1407			1662/1787		
Rated short-circuit making current	Ip (kA)		65			82			104		
Rated breaking time	(cycle)		3								
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	60 (65)								
	Impulse (1.2×50μs)	Up (kV)	125								
Rated operating sequence			O-0.3s-CO-3min-CO								
Control voltage	Closing coil	(V)	DC 48V, DC 110V, DC 125V, DC 220V, AC 48V, AC 110V, AC 220V								
	Trip coil	(V)	DC 48V, DC 110V, DC 125V, DC 220V, AC 48V, AC 110V, AC 220V								
Auxiliary contact			4a4b, 10a10b								
Rated opening time	(sec)		≤ 0.04								
No-load closing time	(sec)		≤ 0.06								
Type test	Mechanical		M2								
	Electrical		E2 (List3)								
	Capacitive current switching		C2								
Lifetime *	Mechanical	(time)	20000								
	Electrical	(time)	20000								
Installation	Fixed		P type								
	Draw-out		H type (for MCSG)								
Pole centre distance	(mm)		275	210	210 (275)	275	210	210 (275)	275		
Weight	CB (H type)	(kg)	295	256	256 (273)	318	256	256 (273)	318		
	Cradle (H type)	(kg)	316	257	257 (284)	316	257	257 (284)	316		
Applied standards			IEC 62271-100								

\* With maintenance



# Vacuum Circuit Breakers

## Susol VCB Series




### VH 06...36

Type			VH-36□25□12/20/32			VH-36□32□12/20/32			VH-36□40□12/20/32		
Rated voltage	Ur (kV)		36								
Rated normal current	Ir (A)		1250	2000	3150	1250	2000	3150	1250	2000	3150
Rated frequency	fr (Hz)		50/60								
Rated short-circuit current	Isc (kA)		25			31.5			40		
Rated short-time withstand current (3 sec)	Ik (kA)		25			31.5			40		
Rated short-circuit breaking capacity	(MVA)		1559			1964			2494		
Rated short-circuit making current	Ip (kA)		65			81.9			104		
Rated breaking time	(cycle)		3								
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	70 (95)								
	Impulse (1.2×50μs)	Up (kV)	170								
Rated operating sequence			O-0.3s-CO-3min-CO								
Control voltage	Closing coil	(V)	DC 48V, DC 110V, DC 125V, DC 220V, AC 48V, AC 110V, AC 220V								
	Trip coil	(V)	DC 48V, DC 110V, DC 125V, DC 220V, AC 48V, AC 110V, AC 220V								
Auxiliary contact			4a4b, 10a10b								
Rated opening time	(sec)		≤ 0.04								
No-load closing time	(sec)		≤ 0.06								
Type test	Mechanical		M2								
	Electrical		E2 (List3)								
	Capacitive current switching		C2								
Lifetime *	Mechanical	(time)	20000								
	Electrical	(time)	20000								
Installation	Fixed		P type								
	Draw-out		H type (for MCSG)								
Pole centre distance	(mm)		300								
Weight	CB (H type)	(kg)	400	490	400	490	400	490	400	490	
	Cradle (H type)	(kg)	700	750	700	750	700	750	700	750	
Applied standards			IEC 62271-100								


\* With maintenance



## Accessories


Dimensions	Main	Cradle
	<ul style="list-style-type: none"> <li>• Secondary trip coil</li> <li>• Under voltage trip release</li> <li>• Current trip coil</li> <li>• Position S/W</li> <li>• Keylock</li> <li>• Button padlock</li> <li>• Button cover</li> <li>• Mechanical position indicator</li> </ul>	<ul style="list-style-type: none"> <li>• Mechanical position indicator</li> </ul>
	<ul style="list-style-type: none"> <li>• Secondary trip coil</li> <li>• Under voltage trip release</li> <li>• Current trip coil</li> <li>• Position S/W</li> <li>• Keylock</li> <li>• Button padlock</li> <li>• Button cover</li> <li>• Plug interlock</li> <li>• Mechanical position indicator</li> </ul>	<ul style="list-style-type: none"> <li>• Earthing S/W</li> <li>• Earthing with electromechanical interlock</li> <li>• Earthing S/W with position S/W</li> <li>• Earthing S/W with keylock</li> <li>• Door interlock</li> <li>• MOC</li> <li>• TOC</li> <li>• Shutter padlock</li> <li>• Emergency mechanical trip device</li> </ul>
	<ul style="list-style-type: none"> <li>• Secondary trip coil</li> <li>• Under voltage trip release</li> <li>• Current trip coil</li> <li>• Position S/W</li> <li>• Keylock</li> <li>• Button padlock</li> <li>• Button cover</li> <li>• Plug interlock</li> <li>• Mechanical position indicator</li> </ul>	<ul style="list-style-type: none"> <li>• Earthing S/W</li> <li>• Earthing with electromechanical interlock</li> <li>• Earthing S/W with position S/W</li> <li>• Earthing S/W with keylock</li> <li>• Door interlock</li> <li>• MOC</li> <li>• TOC</li> <li>• Shutter padlock</li> <li>• Emergency mechanical trip device</li> </ul>

## Various type of Cradle




### E type

- No Shutter
- For MESG



### F type

- Insulation Shutter
- For MESG



### G type

- Bushing
- Insulation Shutter
- For MESG



### H type

- Bushing
- Metal Insulation Shutter
- Closed Compartment structure
- Earthing Switch & Interlock
- For MCSG
- Door Interlock



# Memo

---



## Green Innovators of Innovation



### Safety Instructions

- For your safety, please read user's manual thoroughly before operating.
- Contact the nearest authorized service facility for examination, repair, or adjustment.
- Please contact qualified service technician when you need maintenance. Do not disassemble or repair by yourself!
- Any maintenance and inspection shall be performed by the personnel having expertise concerned.

LSIS Co., Ltd.

© 2004.2 LSIS Co.,Ltd. All rights reserved.


[www.lsis.biz](http://www.lsis.biz)

#### ■ HEAD OFFICE

Korea Gyeonggi-do Anyang-si dongan-gu  
LS-ro 127 (Hogyedong)  
Tel. (82-2)2034-4887, 4873, 4918, 4148  
Fax. (82-2)2034-4648

#### ■ CHEONG-JU PLANT

Cheong-Ju Plant #1, Song Jung Dong, Hung Duk Ku,  
Cheong Ju, 361-720, Korea

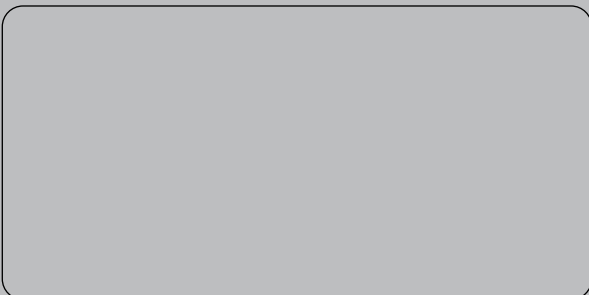

Specifications in this catalog are subject to change without notice due to continuous product development and improvement.

#### ■ Global Network

- **LSIS (Middle East) FZE >> Dubai, U.A.E.**  
Address: LOB 19 JAFZA VIEW TOWER Room 205, Jebel Ali Freezone P.O. Box 114216, Dubai, United Arab Emirates  
Tel: 971-4-886 5360 Fax: 971-4-886-5361 e-mail: dhleef@lsis.biz
- **Dalian LSIS Co., Ltd. >> Dalian, China**  
Address: No.15, Liaoheji 3-Road, Economic and Technical Development zone, Dalian 116600, China  
Tel: 86-411-8273-7777 Fax: 86-411-8730-7560 e-mail: tangyh@lsis.com.cn
- **LSIS (Wuxi) Co., Ltd. >> Wuxi, China**  
Address: 102-A, National High & New Tech Industrial Development Area, Wuxi, Jiangsu, 214028, P.R.China  
Tel: 86-510-8534-6666 Fax: 86-510-522-4078 e-mail: luw@lsis.com.cn
- **LSIS-VINA Co., Ltd. >> Hanoi, Vietnam**  
Address: Nguyen Khe - Dong Anh - Ha Noi - Viet Nam  
Tel: 84-4-882-0222 Fax: 84-4-882-0220 e-mail: sjbaik@lsis.biz
- **LSIS-VINA Co., Ltd. >> Hochiminh, Vietnam**  
Address: 41 Nguyen Thi Minh Khai Str. Yoco Bldg 4th Floor, Hochiminh City, Vietnam  
Tel: 84-8-3822-7941 Fax: 84-8-3822-7942 e-mail: hjchoid@lsis.biz
- **LSIS Shanghai Office >> Shanghai, China**  
Address: Room 32 floors of the Great Wall Building, No. 3000 North Zhongshan Road, Putuo District, Shanghai, China  
Tel: 86-21-5237-9977 Fax: 89-21-5237-7189 e-mail: baijh@lsis.com.cn
- **LSIS Beijing Office >> Beijing, China**  
Address: B-Tower 17FL Beijing Global Trade Center B/D. No.36, BeiSanHuanDong-Lu, DongCheng-District, Beijing 100013, P.R. China  
Tel: 86-10-5825-6025,7 Fax: 86-10-5825-6026 e-mail: sunmj@lsis.com.cn
- **LSIS Guangzhou Office >> Guangzhou, China**  
Address: Room 1403, 14/F, New Poly Tower, No.2 Zhongshan Liu Road, Guangzhou 510180, P.R. China  
Tel: 020-8326-6754 Fax: 020-8326-6287 e-mail: chenxs@lsis.com.cn
- **LSIS Chengdu Office >> Chengdu, China**  
Address: Room 1701 17Floor, huamin hanjun international Building, No1 Fuxing Road Chengdu, 610016, P.R. China  
Tel: 86-28-8670-3201 Fax: 86-28-8670-3203 e-mail: yangcf@lsis.com.cn
- **LSIS Qingdao Office >> Qingdao, China**  
Address: Room 2001,20/F,7B40, Galaxy Building, No.29 Shandong Road, Shinan District, Qingdao 266071, P.R. China  
Tel: 86-532-8501-6058 Fax: 86-532-8501-6057 e-mail: wangzy@lsis.com.cn
- **LSIS NETHERLANDS Co.Ltd >> Schiphol-Rijk, Netherlands**  
Address: 1st. Floor, Tupolevlaan 48, 1119NZ, Schiphol-Rijk, The Netherlands  
Tel: 31-20-654-1420 Fax: 31-20-654-1429 e-mail: junshickp@lsis.biz
- **LSIS Gurgaon Office >> Gurgaon, India**  
Address: 109 First Floor, Park Central, Sector-30, Gurgaon- 122 002, Haryana, India e-mail: hwyim@lsis.biz